

Specifications:

Material And Finish:

Insulator: PBT UL94V-0

Color: See Ordering Information

Contact: Copper alloys

Plated: See Ordering Information

Rating:

Current Rating: 9 Amp (Power)

Voltage Rating: 16V DC






Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute

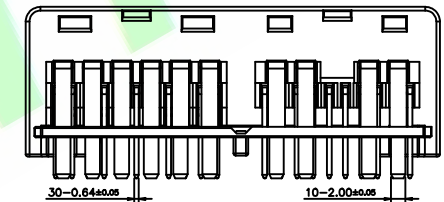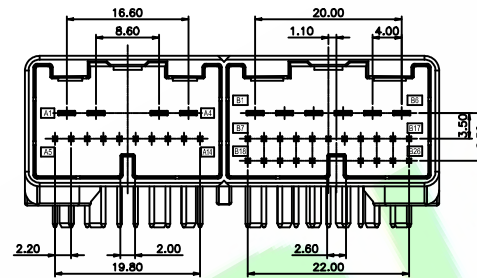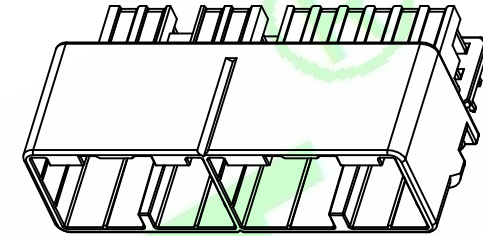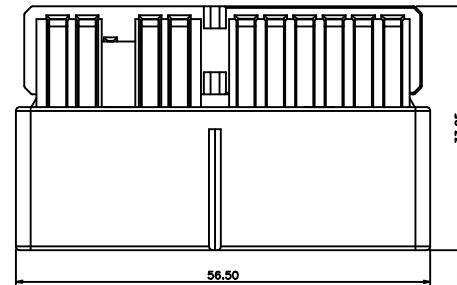

Ordering Information

A22300R1-40Q-01-BC

1 2 3 4 5 6

1: — Series No.



2: — R1:R/A Type

3: — No. of Positions

4: — Q: Ni40-120u", Bright Tin 80-160u"

5: — B: Black

6: — C: In Tray

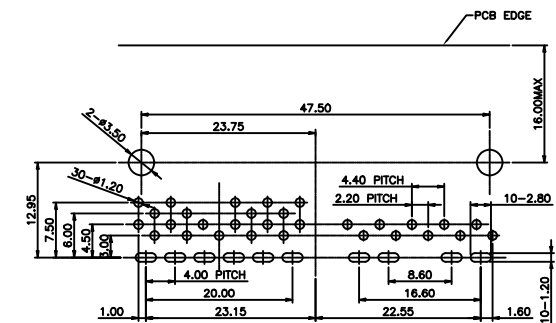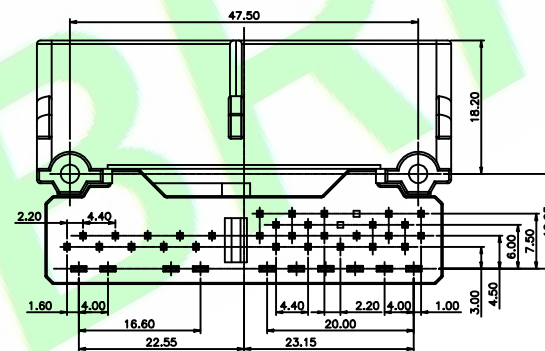

Recommended PCB LAYOUT (TOP VIEW)

Tolerance: $\pm 0.05\text{mm}$


5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A22300R1-40Q-01-BC
4X				Hu.CH	LINEAR	ANGLES	DWG. NO.:
3X				CHKD.:	X.:	X': $\pm 5.0^{\circ}$	TITLE :
2X				Sam	X.X: ± 0.35	X.X': $\pm 3.0^{\circ}$	025/090 SERIES CAP ASSEMBLY
1X	ORIGINAL	Hu.CH		APPD.:	X.XX: ± 0.25	X.XX': $\pm 2.0^{\circ}$	DATE: 12-Apr-2024
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ± 0.15	X.XXX': $\pm 1.0^{\circ}$	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4