

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:30m Ohm Max






Insulator resistance:1000M ohm min

Withstanding Voltage:800V AC/Minute

Ordering Information

A25001S-XXQ-01-A

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— Q: Tin plated
5:— A: In bag

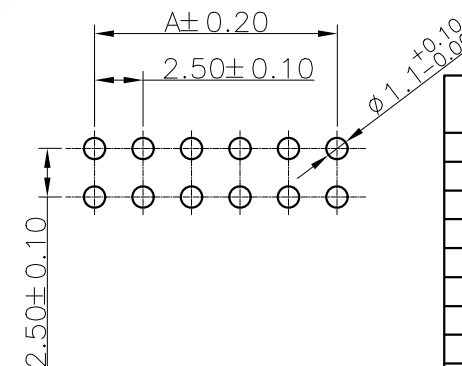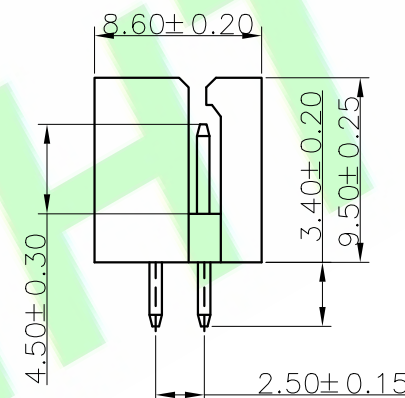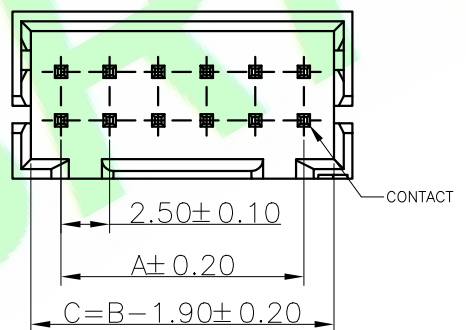

编号	尺寸 (mm)	
	A	B
2*2P	2.50	7.50
2*3P	5.00	10.00
2*4P	7.50	12.50
2*5P	10.00	15.00
2*6P	12.50	17.50
2*7P	15.00	20.00
2*8P	17.50	22.50
2*9P	20.00	25.00
2*10P	22.50	27.50
2*11P	25.00	30.00
2*12P	27.50	32.50
2*20P	47.50	52.50

DR.BY.: Anne	GENERAL TOLERANCE:		PART NO : A25001S-XXQ-01-A
	LINEAR	ANGLES	
CHKD.: Judyyan	x.:	x': ±2'	DWG. NO.:
	x.x: ±0.25	x.x':	
APPD.: Billy	x.xx: ±0.20	x.xx':	TITLE : 2.50m Pitch Wafer Straight Type
	x.xxx: ±0.10	x.xxx':	
DATE: 04-Nov-2024			

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Anne	
REV.	DESCRIPTION	DR.BY	ECN. NO