

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Nature

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.




Withstanding Voltage:1000V AC/Minute

Ordering Information

A2500S-XXQ-01-A

1 2 3 4 5

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— Q:Tin Plated
5:— A:In Bag

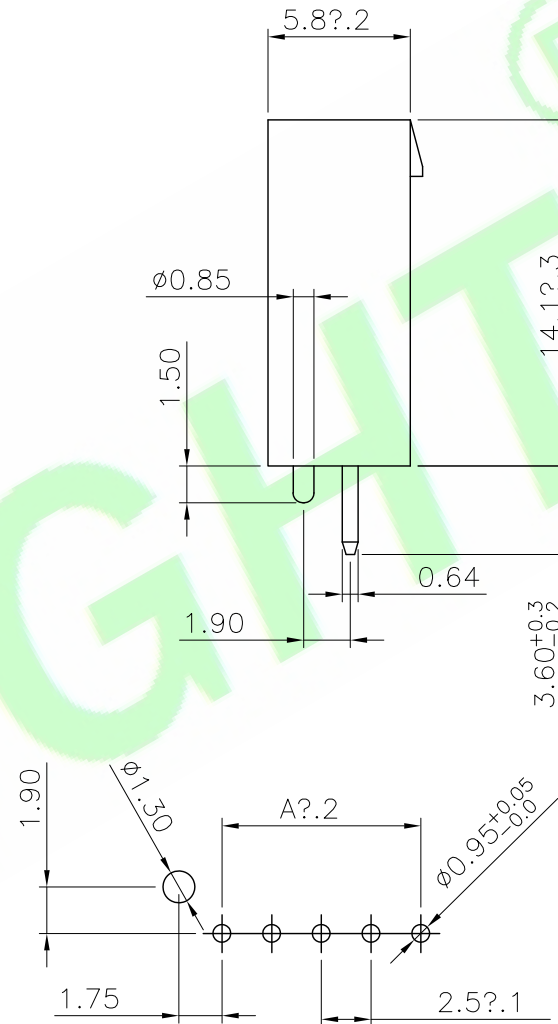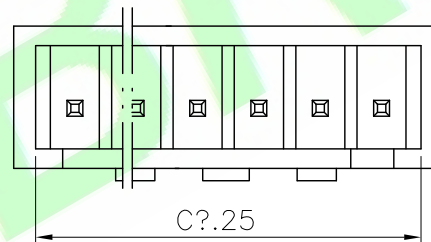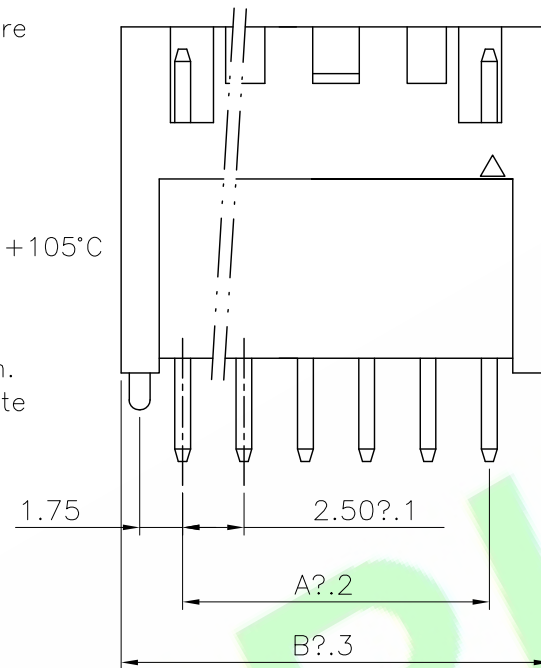

P.C.B LATOUT

Pin	Dimension mm		
	A	B	C
02	2.50	7.50	5.70
03	5.00	10.00	8.20
04	7.50	12.50	10.70
05	10.00	15.00	13.20
06	12.50	17.50	15.70
07	15.00	20.00	18.20
08	17.50	22.50	20.70
09	20.00	25.00	23.20
10	22.50	27.50	25.70
11	25.00	30.00	28.20
12	27.50	32.50	30.70
13	30.00	35.00	33.20
14	32.50	37.50	35.70
15	35.00	40.00	38.20


5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A2500S-XXQ-01-A
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Aren	X.: ±0.30	X': ±5.0°	TITLE :
2X					X.X: ±0.20	X.X': ±3.0°	2.50mm Pitch Wafer Straight Type
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 24-Apr-2019
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4