

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 25/%GF UL94V-0

Color:Black

Contact:Brass

Plated:3~7um Sn over 1.27um Min Ni

Rating:

Current Rating:6.0 Amp

Voltage Rating:32V AC/DC




Operating Temperature Range:-20°C~+120°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

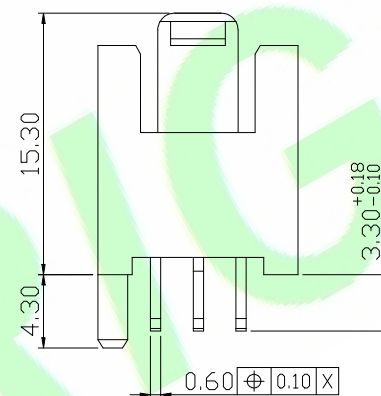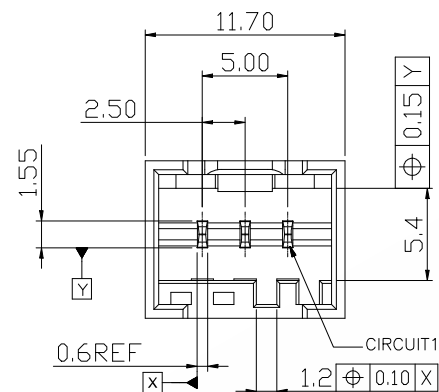

Standard PCB Layout—Odd cct size

Ordering Information

A2504S-03Q-01-A

- 1: — Series No.
2: — S:Straight Type
3: — No. of Positions
4: — Q:Tin Plated
5: — A:In Bag
B:In Tube
C:In Tray

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A2504S-03Q-01-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				A4
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0°	TITLE : 2.5mm Pitch Wafer 3P	SHEET: 1/1				
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1				
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 1-Apr-2023	UNIT: mm	THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°						