

Specifications:
Material And Finish:
Insulator:Nylon66 UL94V-0 Color:Black
Contact:Brass
Plated:Tin Plated Over Ni





Rating:
Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C
Specifications:

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute


Ordering Information

A25080R-16Q-01-X

- 1: Series No.
2: R/R/A Type
3: No. of Positions
4: Q: Tin Plated
5: A: In Bag
C: In Tray

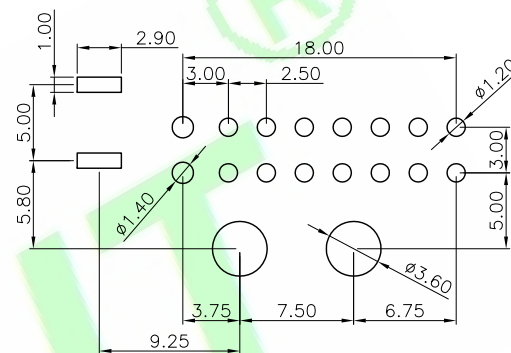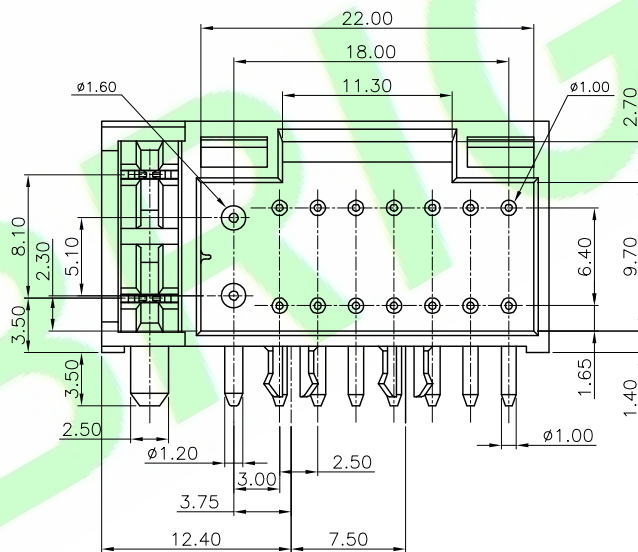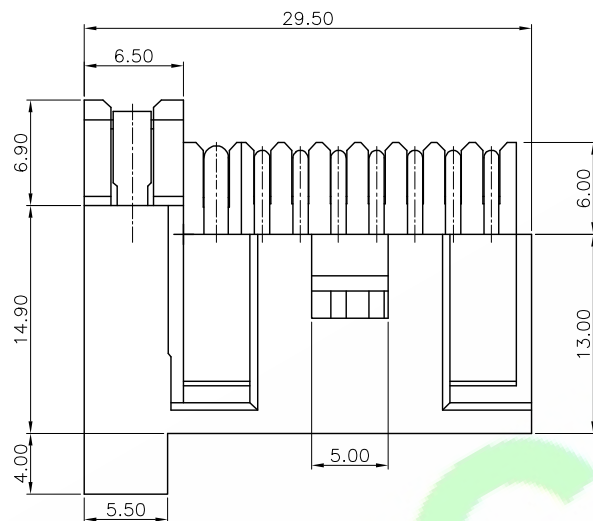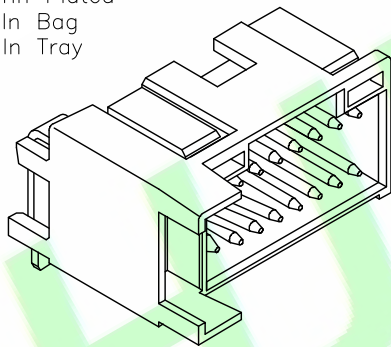

Recommended PCB Layout
(Tolerances: ±0.05mm)

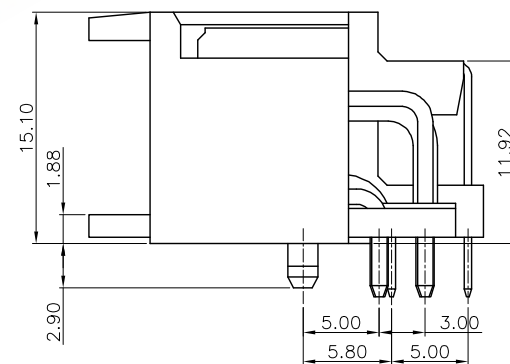

5X				DR.BY.:	Samson	GENERAL TOLERANCE:		PART NO : A25080R-16Q-01-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.:	Tony	LINEAR	ANGLES	DWG. NO.:		
3X						X.:	X': ±5.0°	TITLE :	SHEET: 1/1	THIRD ANGLE PROJECTION
2X						X.X: ±0.30	X.X': ±3.0°	2.50mm/3.00mm W-T-B Header With Single fuse Socket	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.:	Billy	X.XX: ±0.20	X.XX': ±2.0°	DATE: 24-Apr-2008	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XXX: ±0.10	X.XXX': ±1.0°			A4