

Specifications:

Material And Finish:

Insulator:PBT+30%GF UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:6.0 Amp

Voltage Rating:250V AC/DC







Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Valtage:1000V AC/minute

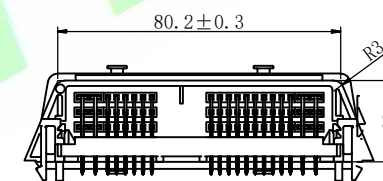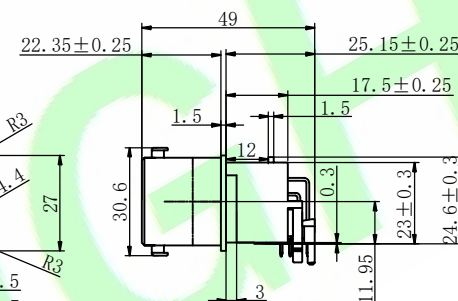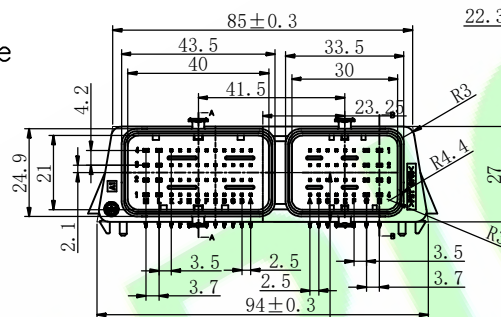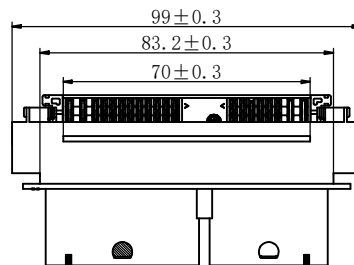

Ordering Information

A25370R1-80S-01-C

1 2 3 4 5




1: — Series No.

2: — R:R/A Type


3: — No. of Positions

4: — S:Matte Tin Plated

5: — C:In Tray

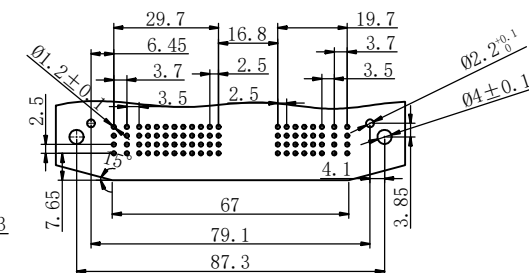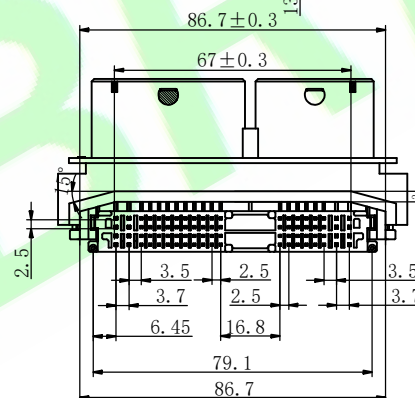

RECOMMENDED PCB LAYOUT

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : A25370R1-80S-01-C	HJBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司		
4X						LINEAR	ANGLES			
3X				CHKD.: Tony	x.: ±0.40	x': ±2.0°	TITLE : CMC HEADER 80P CONNECTOR	SHEET: 1/1		A4
2X					x.x: ±0.30	x.x': ±2.0°		SCALE: 1:1		
1X	ORIGINAL	Zolin		APPD.:	x.xx: ±0.20	x.xx': ±2.0°		DATE: 31-Jul-2022		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±2.0°				