

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0
Contact:High Conductivity Copper
Plated:See Ordering Information

Rating:

Current Rating:7.5 Amp
Voltage Rating:12V AC/DC
Operating Temperature
Range:-40°~+105°C








Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

A25414R3-04S-01-X
1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — S:Matte Tin Plated
5: — A:In Bag
B:In Tube
C:In Tray
G:Tape&Reel

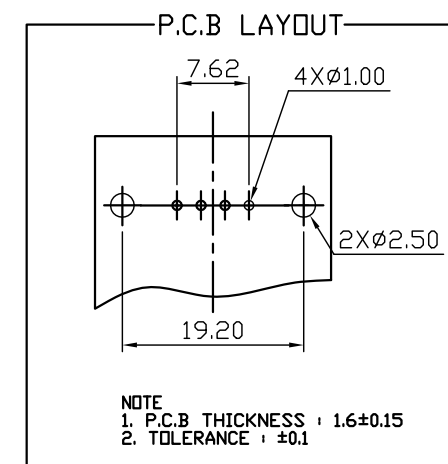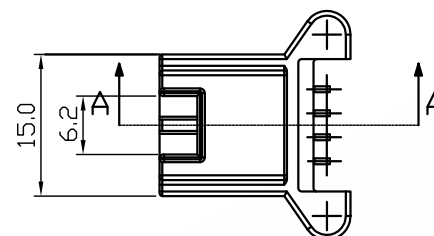

2X	Update the drawings	Zolin	20260407
1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Sam	X.: ±0.30	X': ±5.0°
APPD.: Billy	X.X: ±0.25	X.X': ±3.0°
	X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : A25414R3-04S-01-X
DWG. NO.:
TITLE : MQS 4P CAP ASSEMBLY(HORIZONTAL TYPE)
DATE: 08-Mar-2026

HJBRIGHT® 东莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	

A4