

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:3.5 Amp (22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Dielectric Voltage:500V AC/Minute

Ordering Information

A25414RA-03Q-03-X

1 2 3 4 5

1:— Series No.








2:— R:R/A Type

3:— No. of Positions


4:— Q: Tin Plated

5:— A: In Bag

C: In Tray

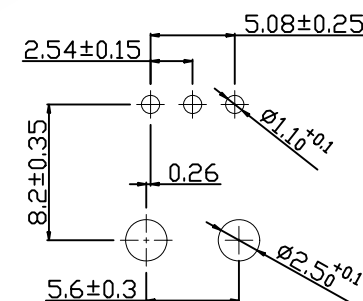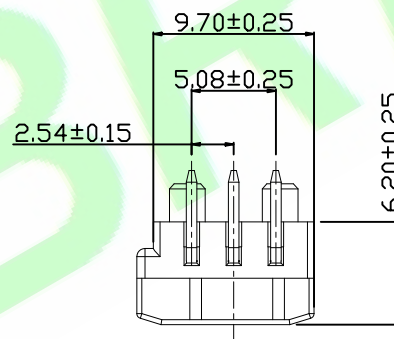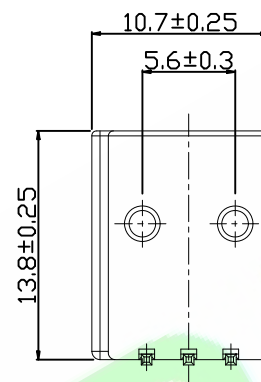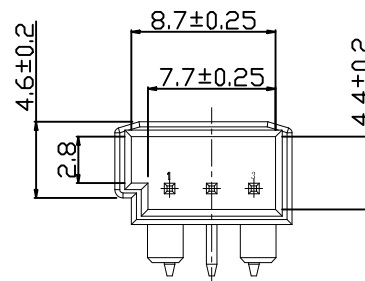

PCB LAYOUT

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A25414RA-03Q-03-X	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION		A4
4X				CHKD.: Mark	LINEAR	ANGLES	DWG. NO.:						
3X					x.: ±0.30	x': ±5.0°	TITLE : 2.54mm PITCH CN12 Series PCB Header R/A Type						
2X	Update Code options	Judyyan	20231106	x.x: ±0.20	x.x': ±3.0°								
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 30-Jun-2019	SHEET: 1/1					
REV.	DESCRIPTION	DR.BY	ECN. NO.	x.xxx: ±0.10	x.xxx': ±1.0°	SCALE: 1:1		UNIT: mm					