

Specifications:**Material And Finish:**

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature

Range:-40°~+125°C

Electrical:


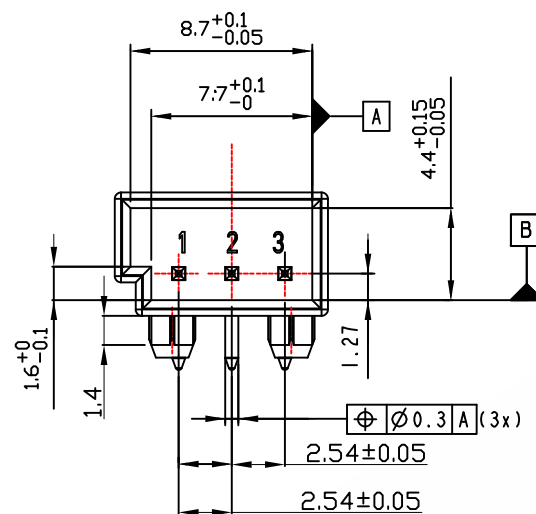

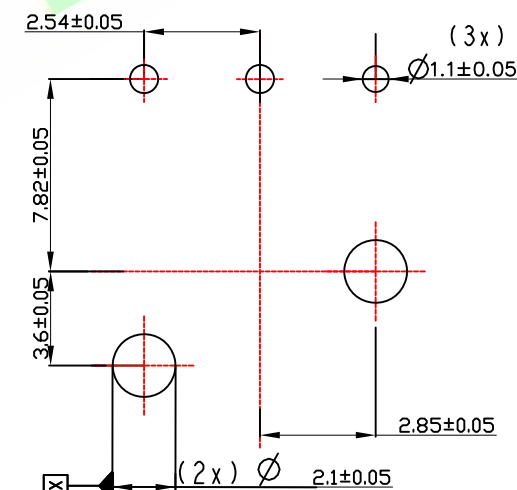
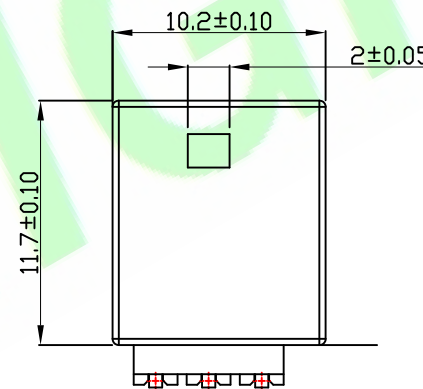
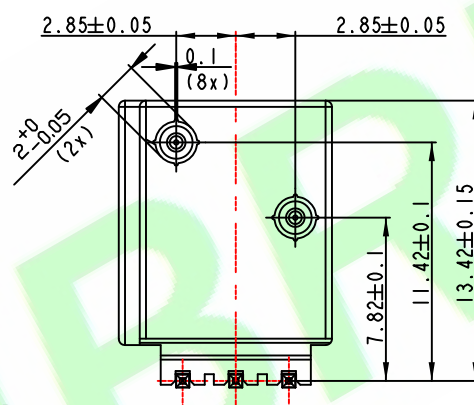


Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Dielectric Voltage:500V AC/Minute

Ordering Information**A25414RA-03Q-0X-X**

- 1 2 3 4 5 6
- 1: — Series No.
 2: — R:R/A Type
 3: — No. of Positions
 4: — Q: Tin Plated
 5: — 01:A TYPE
 02:B TYPE
 6: — A: In Bag
 C: In Tray

**A Type****B Type**

RECOMMENDED PCB LAY-OUT
 empfohlenes Leiterplatten -Layout
 (NOT TO SCALE)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A25414RA-03Q-0X-C	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Apeng	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm PITCH CN12 Series PCB Header R/A Type	SHEET: 1/1			A4
2X				Aren	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Apeng		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 30-Jun-2019			THIRD ANGLE PROJECTION	