
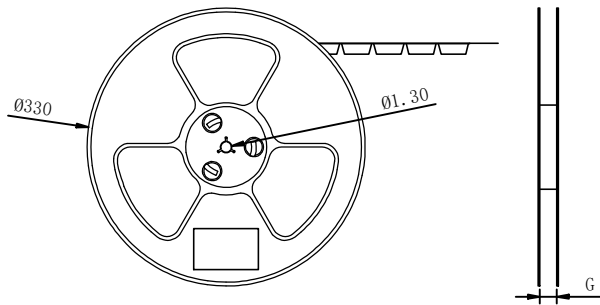
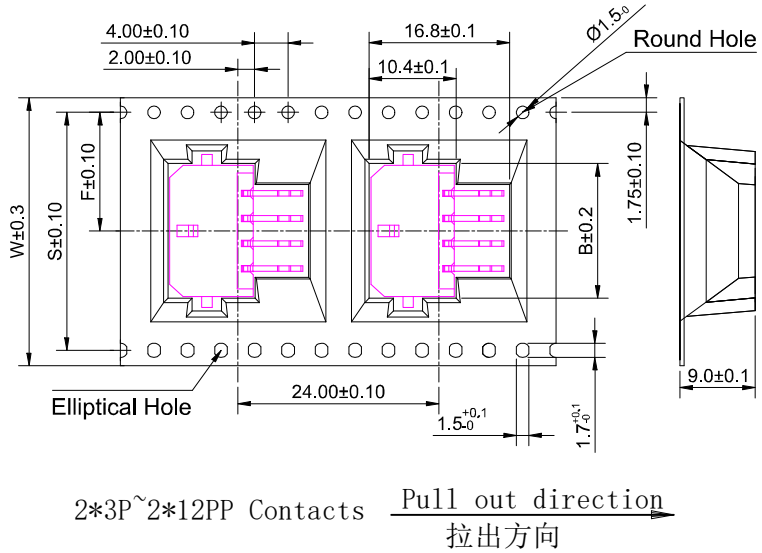


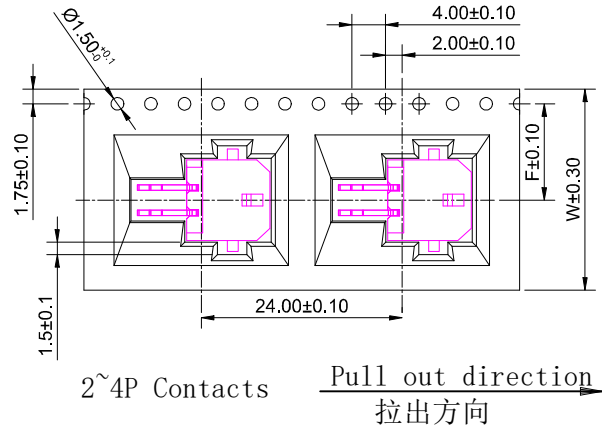

Empty 10 Holes
空10穴

Product 300PCS

Leader Part Empty 10 Holes
前空10穴

Axes

Product 320 PCS

TOP TAPE 200mm
上带200mm

Note:


- Carrier Camber Is Within 1mm In 100mm;
带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM;
圆孔十个孔距累计允许公差为 ± 0.2 mm
- Carrier tape material for PS;
下带材质为PS材质; Color颜色: 透明
- Thickness $= 0.40 \pm 0.05$;
材料厚度为 0.40 ± 0.05 mm
- 1 REEL/300PCS
1卷300个

Number of Contacts		W	S	F	T	G	REEL /PCS
02	2*1P	24	/	11.50	27.0	25.4	300
04	2*2P						
06	2*3P	32	28.4	14.20	35.0	33.4	300
08	2*4P						
10	2*5P						
12	2*6P	44	40.4	20.20	48.5	44.4	300
14	2*7P						
16	2*8P						
18	2*9P						
20	2*10P	56	52.4	26.20	60.5	56.4	300
22	2*11P						
24	2*12P	56	52.4	26.20	60.5	56.4	300

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:	
CHKD.: Aren	LINEAR	ANGLES
APPD.: Billy	X.: ± 0.30	X': $\pm 5.0^\circ$
	X.X: ± 0.20	X.X': $\pm 3.0^\circ$
	X.XX: ± 0.15	X.XX': $\pm 2.0^\circ$
	X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$

PART NO : DWG. NO.: TITLE : A30001H-XXX-01-G 包装规范
DATE: 21-Feb-2023

HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		