

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA6T UL94V-0 Color:Natural
Contact:Brass
Plated:See Ordering Information





Rating:
Current Rating:1.0 Amp
Voltage Rating:1400V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:3800V AC/Minute

Ordering Information
A3500R-XXX-02-X

1 2 3 4 5

- 1: Series No.
2: R:R/A Type
3: No. of Positions
4: A:Glod flash
Q: Tin Plated
5: A:In Bag
C:In Tray

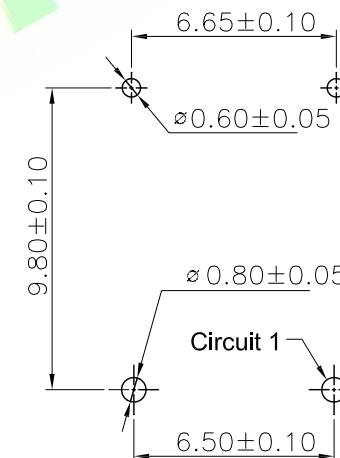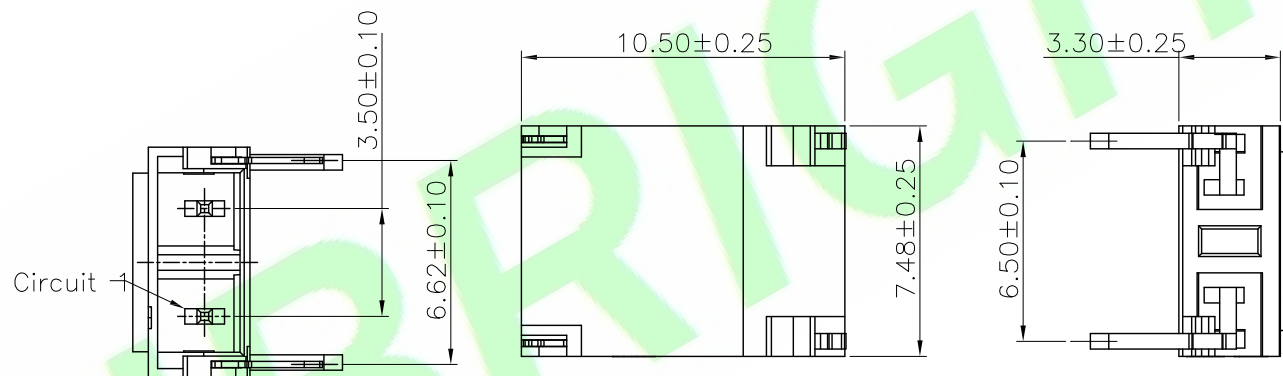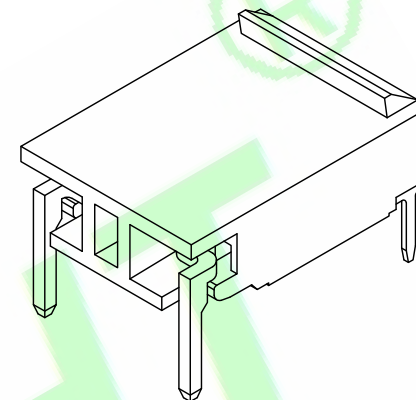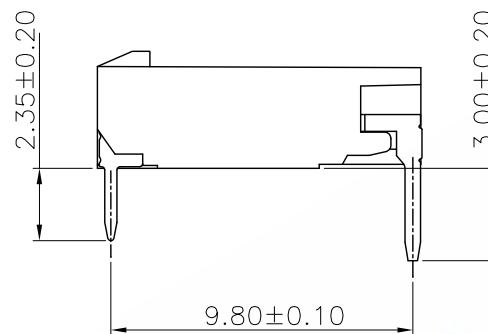

P.C.B LAYOUT

5X				DR.BY: Tsw	GENERAL TOLERANCE:		PART NO : A3500R-XXX-02-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED														
4X					LINEAR	ANGLES	DWG. NO.:																
3X				CHKD.: Aren	X.:	X': ±1.0°	TITLE : 3.5mm Series connector		SHEET: 1/1			A4											
2X					X.X: ±0.35	X.X':			SCALE: 1:1														
1X	ORIGINAL	Tsw		APPD.: Billy	X.XX: ±0.25	X.XX':	DATE: 30-Aug-2021		UNIT: mm				THIRD ANGLE PROJECTION										
REV.	DESCRIPTION	DR.BY	EDN. NO.		X.XXX: ±0.10	X.XXX':																	
1			2			3			4			5			6			7			8		