

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Nature

Contact:Brass

Rating:

Current Rating:10.0 Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature Range:-30°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.







Withstanding Voltage:1800V AC/Minute

Ordering Information

A3501R-06S-01-C

1 2 3 4 5

- 1: — Series No.
 2: — R:R/A Type
 3: — No. of Positions
 4: — S:Matte Tin plated
 5: — C:In Tray

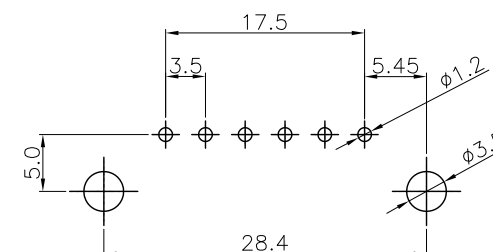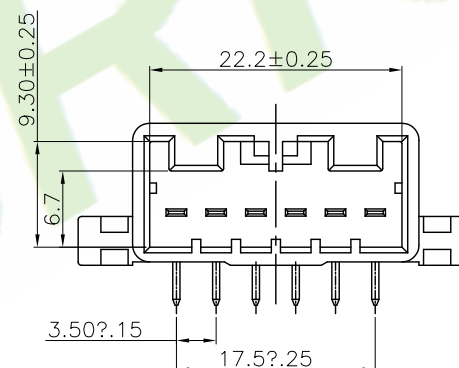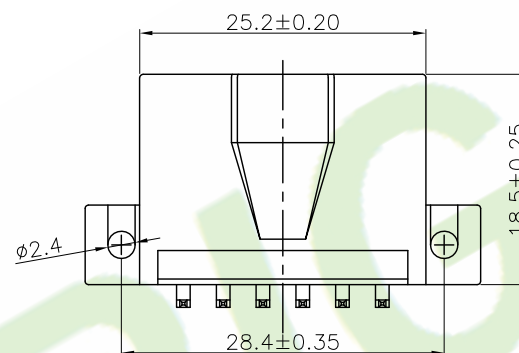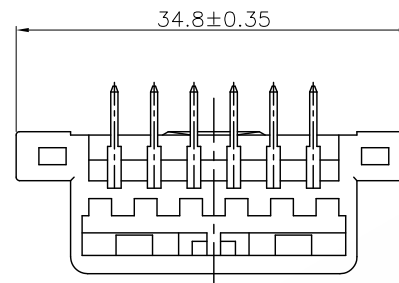

PCB LAYOUT

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A3501R-06S-01-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.:	x': ±5.0°	TITLE : Pitch 2.00mm SMT Wafer Type Connectors				
2X				Aren	x.x: ±0.30	x.x': ±3.0°					
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 27-Sep-2021				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					

SHEET: 1/1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION