

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp (16AWG)

Voltage Rating:630V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:10m Ohm Max






Insulator resistance:1000M Ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information**A39610R-XXX-01-XX**

1 2 3 4 5 6

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q:Tin Plated
5: — Color: B-Black
W-White
6: — A:In Bag
B:In Tube
C:In Tray

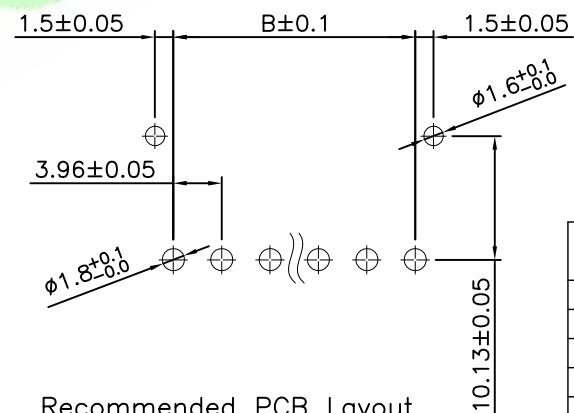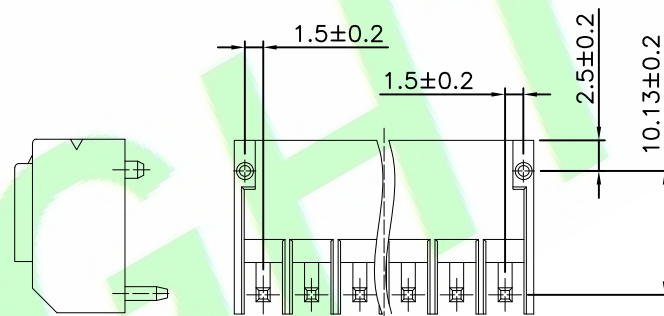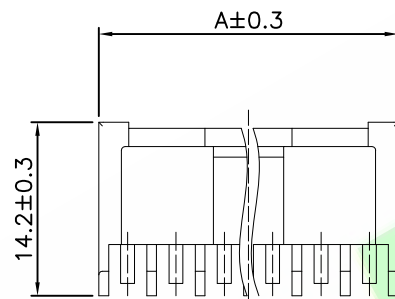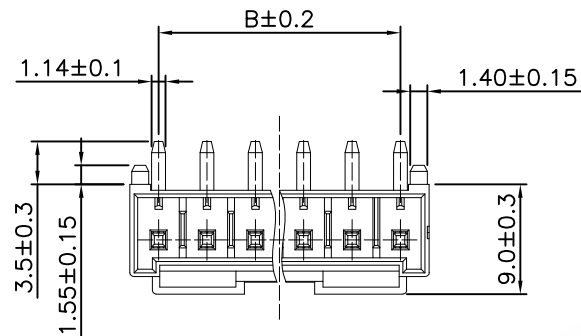

Recommended PCB Layout

PIN	Dimension mm	
	A	B
01	6.20	
02	8.66	3.96
03	12.62	7.92
04	16.58	11.88
05	20.54	15.84
06	24.50	19.80

5X			
4X			
3X			
2X			
1X	ORIGINAL	PIP	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.:	PIP
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A39610R-XXX-01-XX
DWG. NO.:
TITLE : 3.96mm Pitch Wafer R/A Type
DATE: 26-Jun-2020

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4