

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp (16AWG)

Voltage Rating:630V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1500V AC/Minute


Ordering Information

A39610S-XXX-02-XX

1	2	3	4	5	6
---	---	---	---	---	---

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — Color: B-Black
W-White
6: — A: In Bag
C: In Tray

*Diagram of standard type.

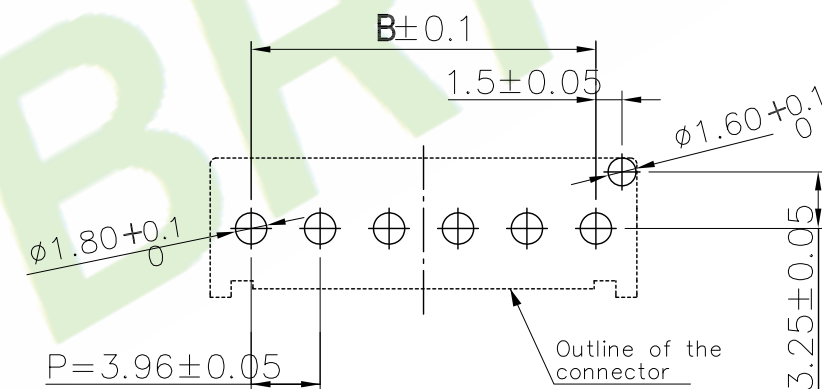

PIN	Dimension mm	
	A	B
01	6.20	
02	8.66	3.96
03	12.62	7.92
04	16.58	11.88
05	20.54	15.84
06	24.50	19.80

5X				DR.BY.:		GENERAL TOLERANCE:	PART NO : A39610S-XXX-02-XX
4X				Deng		LINEAR	DWG. NO.:
3X				CHKD.:		ANGLES	TITLE :
2X				Aren		X.: ±0.30	3.96mm Pitch Wafer Straight Type
1X	ORIGINAL	Deng		APPD.:		X.X: ±0.20	DATE: 06-April-2022
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy		X.XX: ±0.15	
						X.XXX: ±0.10	
						X.XXX': ±1.0'	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4