

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A3962S-XXX-01-A

1 2 3 4 5

1:— Series No.

2:— S: Straight Type


3:— No. of Positions

4:— A: Gold Flash

Q: Tin Plated

S: Matte Tin Plated

5:— A: In Bag

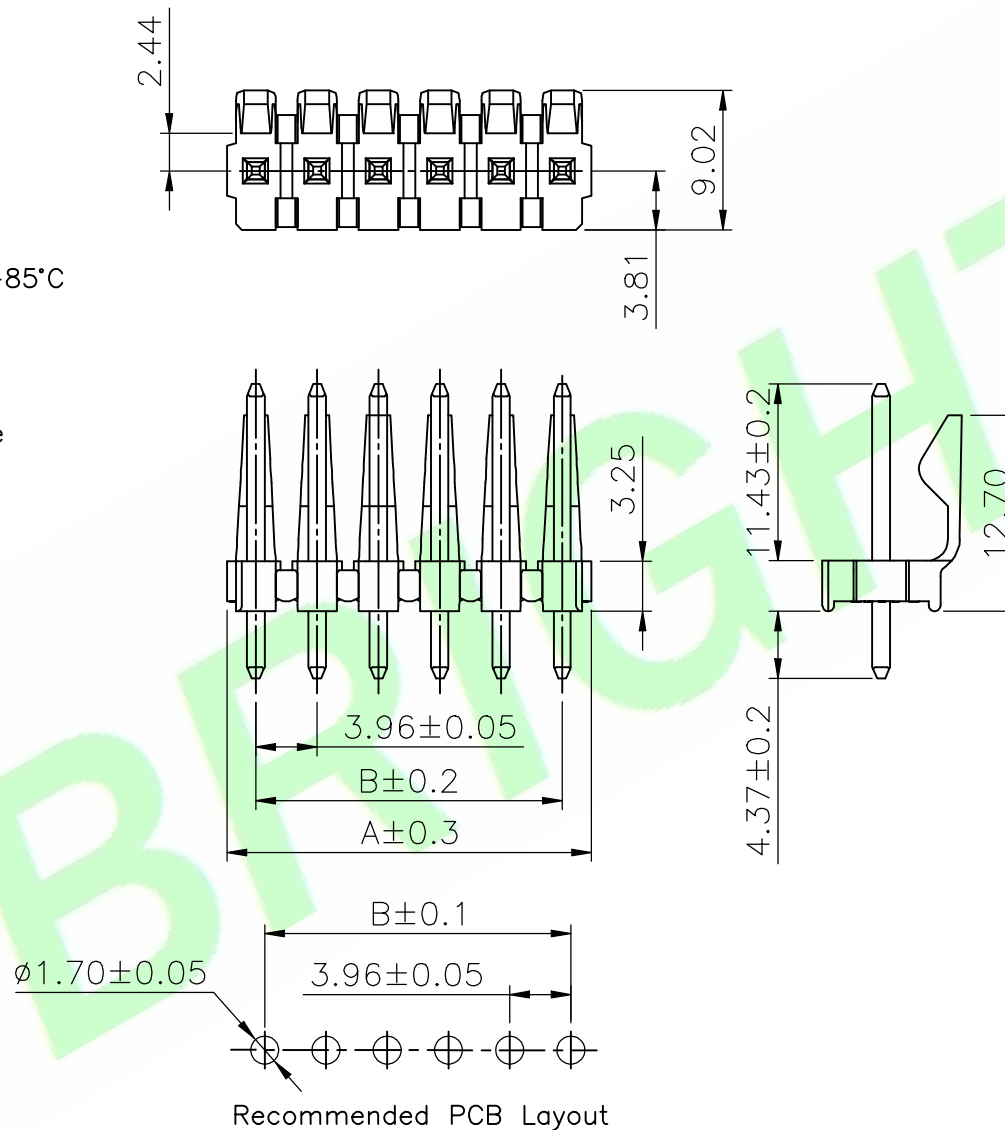

Circuits	Dimension mm	
	A	B
02	6.78	3.96
03	10.74	7.92
04	14.70	11.88
05	18.66	15.84
06	22.62	19.80
07	26.58	23.76
08	30.54	27.72
09	34.50	31.68
10	38.46	35.64
11	42.42	39.60
12	46.38	43.56
13	50.34	47.52
14	54.30	51.48
15	58.26	55.44
16	62.22	59.40
17	66.18	63.36
18	70.14	67.32
19	74.10	71.28
20	78.06	75.24
21	82.02	79.20
22	85.98	83.16
23	89.94	87.12
24	93.90	91.08

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A3962S-XXX-01-A	
4X					LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.: Tony	X.: ± 0.30	X': $\pm 5.0^\circ$	TITLE :	
2X					X.X: ± 0.20	X.X': $\pm 3.0^\circ$	3.96mm Pitch Wafer Straight Type	
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ± 0.15	X.XX': $\pm 2.0^\circ$	DATE: 26-Jun-2008	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4