

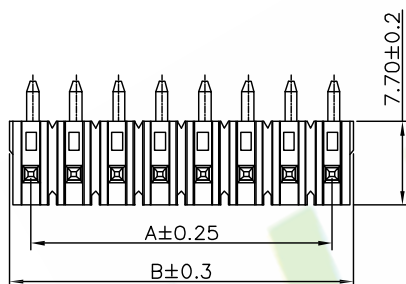
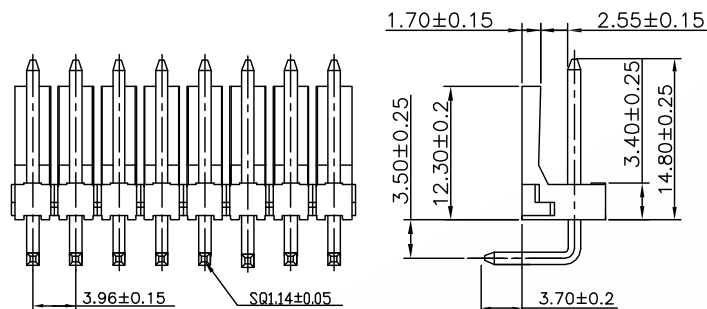
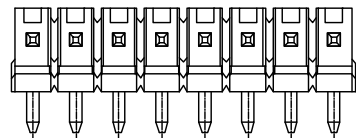




7-18PIN

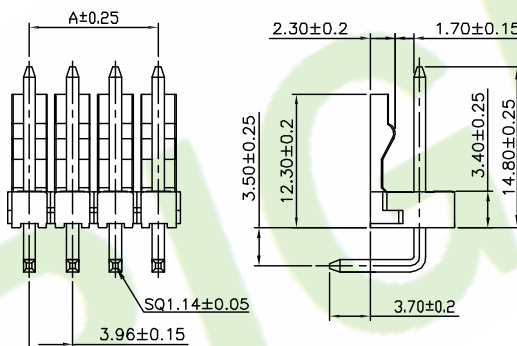

2-6PIN



Recommended PBC Layout

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0,Color:White
Contact:Brass

Rating:
Current Rating:7.0Amp(18AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

Ordering Information

A3963AR-XXX-01-A

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q: Tin Plated
5: — A: In bag

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	3.96	7.92	11	39.60	43.56
03	7.92	11.88	12	43.56	47.52
04	11.88	15.84	13	47.52	51.48
05	15.84	19.80	14	51.48	55.44
06	19.80	23.76	15	55.44	59.40
07	23.76	27.72	16	59.40	63.36
08	27.72	31.68	17	63.36	67.32
09	31.68	35.64	18	67.32	71.28
10	35.64	39.60			

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A3963AR-XXX-01-A
DWG. NO.:
TITLE : 3.96mm Pitch Wire to Board
DATE: 23-Jul-2013

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4