

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Contact:Brass

Rating:

Current Rating:10.0Amp(16AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max






Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

A3966S-XXX-01-XA
1 2 3 4 5 6

- 1: — Series No.
2: — S:Starigh type
3: — No. of Positions
4: — Q: Tin Plated
5: — N: Natural
B: Black
6: — A: In Bag

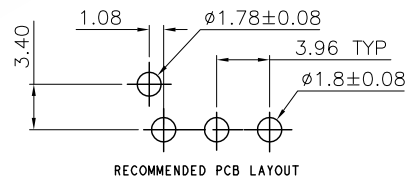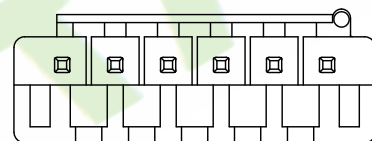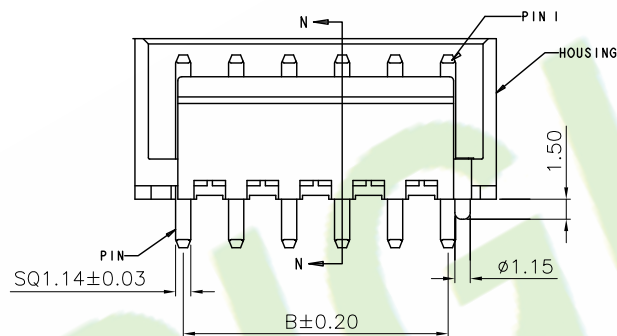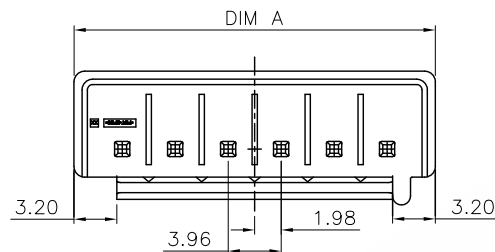

Circuits	Dimension mm	
	A	B
02	11.17	3.96
03	15.13	7.92
04	19.09	11.88
05	23.05	15.84
06	27.01	19.80
07	30.97	23.76
08	34.93	27.72
09	38.89	31.68
10	42.85	35.64
11	46.81	39.60
12	50.77	43.56

5X			
4X			
3X			
2X	Update code option	Judyann	20230102
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Samson
CHKD.:	Kenry
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A3966S-XXX-01-XA
DWG. NO.:
TITLE : 3.96mm Pitch Wafer
DATE: 08-Jan-2016

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4