

Specifications:**Material And Finish:**

Insulator:Nylon 66

Contact:Brass

Rating:

Current Rating:7.0 Amp(18AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute


Ordering Information**A3969R-XXX-01-XA**

1 2 3 4 5 6

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions
4:— A:Gold Flash
Q: Tin Plated
5:— B:Black
W:White
6:— A:In bag

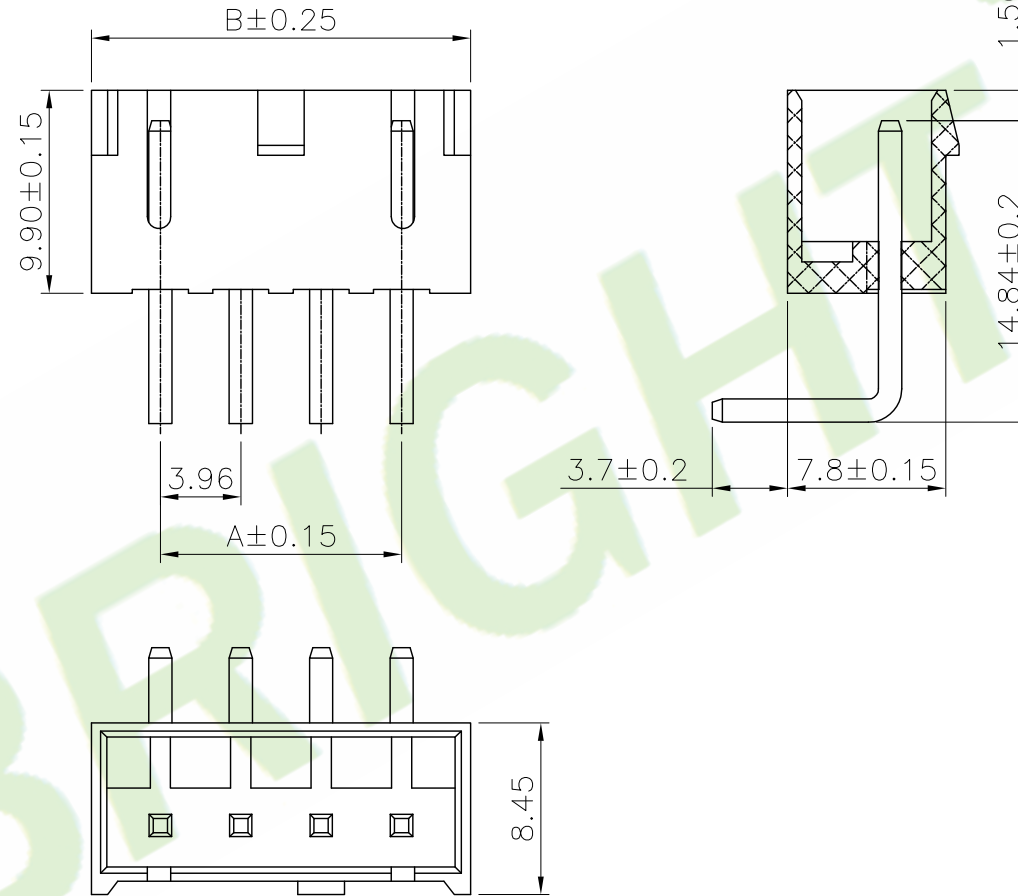

PIN	A	B
2	3.96	10.68
3	7.92	14.64
4	11.88	18.60
5	15.84	22.56
6	19.80	26.52
7	23.76	30.48
8	27.72	34.44
9	31.68	38.40
10	35.64	42.36
11	39.6	46.32
12	43.56	50.28
13	47.52	54.24
14	51.48	58.20
15	55.44	62.16
16	59.40	66.12
17	63.36	70.08
18	67.32	74.04

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : A3969R-XXX-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch Wafer Connector	SHEET: 1/1		A4	
2X	Update code option	Judyyan	20221230	Tony	x.X: ±0.20	x.X': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.:	x.XX: ±0.15	x.XX': ±2.0°	DATE: 24-Jun-2015	UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.XXX: ±0.10	x.XXX': ±1.0°					THIRD ANGLE PROJECTION