

A

[illegible][illegible][illegible]

B

[illegible][illegible][illegible]

C

[illegible]

[illegible]

1

[illegible]

[illegible]




1

[illegible][illegible]

1

1


10

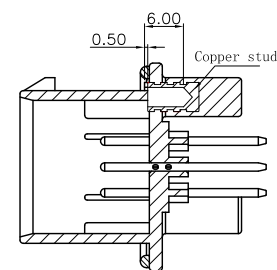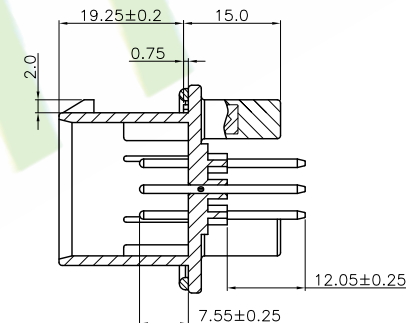


Reference drawing of embedded depth of stud

	1	2	3	4	5	6	7	8	
--	---	---	---	---	---	---	---	---	--


Key Location As Shown

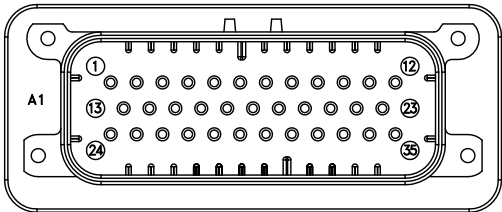


35P

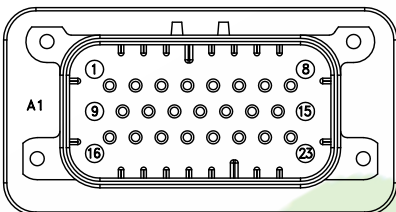


23P

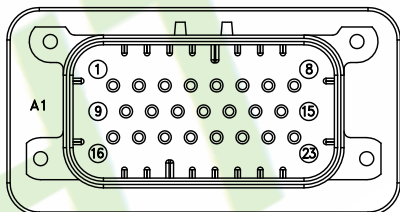

23P(White)



14P



8P


No. of Positions	Dimension (mm)				
	A	B	C	D	E
08	40.8	27.4	23.4	8.0	30.4
14	48.8	35.4	31.4	16	38.4
23	60.8	47.4	43.4	28	50.4
35	76.8	63.4	59.4	44	66.4

5X			
4X			
3X			
2X	Update code option	Deng	20230411
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Kenry
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A400005S-08X-01-BC
DWG. NO.:
TITLE : 4.00mm Pitch Header Assembly, Straight Type
DATE: 19-Jan-2015

HJBRIGHT ® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 2/2		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		