

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp(16AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

A400005S-35X-01-C

1 2 3 4 5

1: — Series No.

2: — S: Straight Type

3: — No. of Positions




4: — A: Gold Flash

H: Gold Flash on Contact; Matte Tin on tail


Q: Tin Plated

S: Matte Tin Plated

5: — C: In Tray

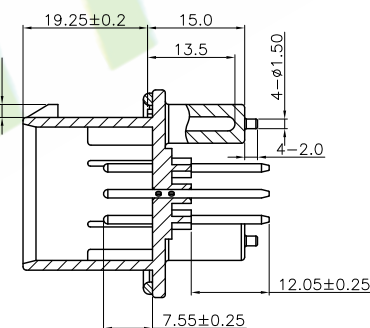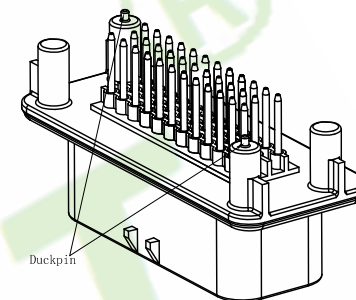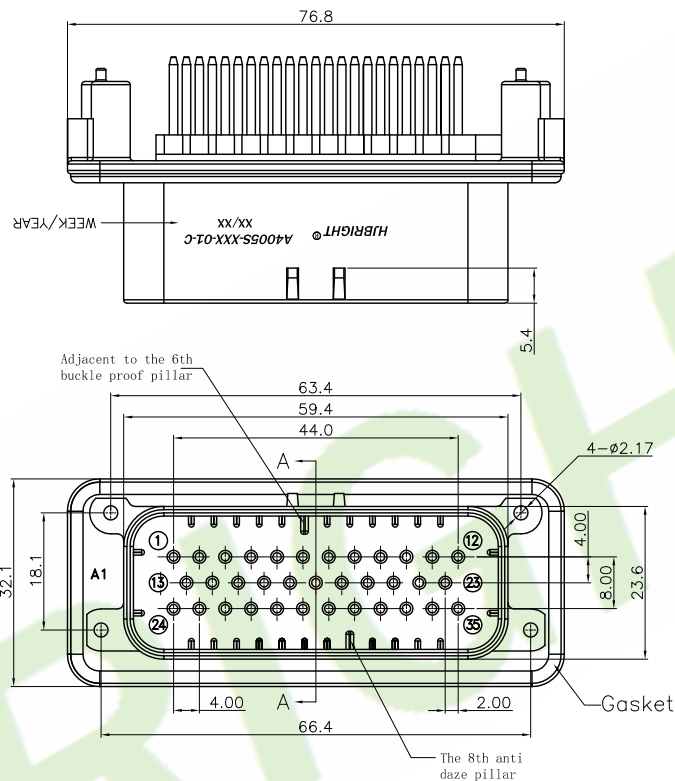

SEC: A-A

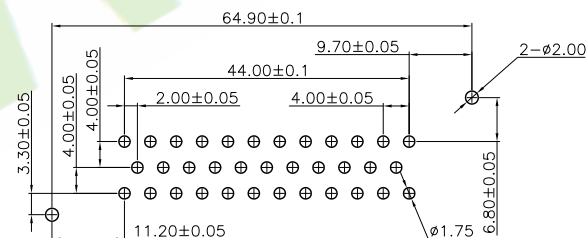

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : A400005S-35X-01-C	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4		
4X					CHKD.: Tony	LINEAR				
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°			
2X	Update code option	Deng	20230413		x.x: ±0.20	x.x': ±3.0°	SHEET: 1/1			
1X	ORIGINAL	Kenry			x.xx: ±0.15	x.xx': ±2.0°	SCALE: 1:1			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 19-Jan-2015	UNIT: mm		