


Specifications:
Material And Finish:
Insulator:PBT UL94V-0 Color:Black
Contact:Brass
Bush;Brass
Plated:See Ordering Information

Rating:
Current Rating:10.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.

Ordering Information
A4005S-23Q-05-C



- 1: — Series No.
2: — S:Straight Type
3: — No. of Positions
4: — Q:Tin Plated
5: — C:Tray

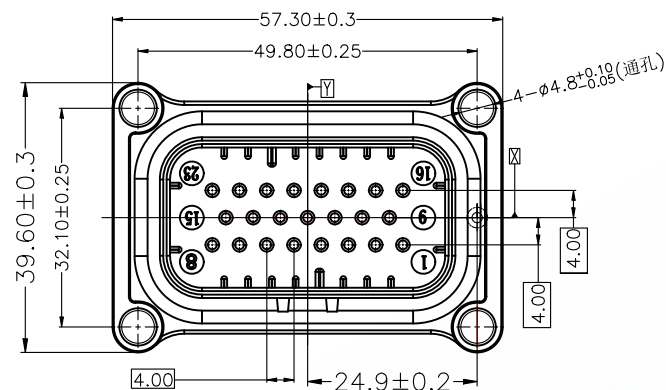

molding copper bush

RoHS Compliant

Automobile Product

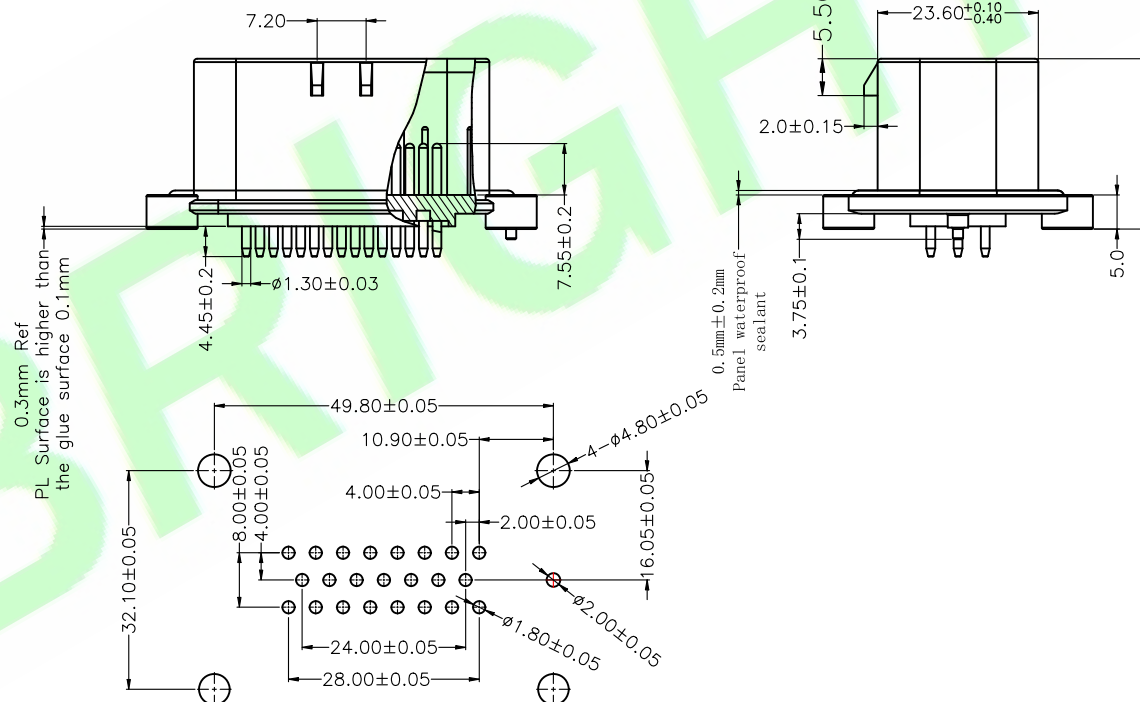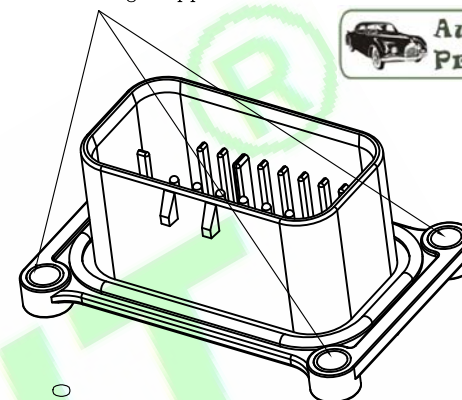

Recommended PCB Layout

DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : A4005S-23Q-05-C	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
	LINEAR	ANGLES	DWG. NO.:				
CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 4.00mm Pitch Header Assembly, Straight Type		SHEET: 1/1		A4
	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm		
	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 7-Dec-2021	THIRD ANGLE PROJECTION			

1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO