

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:13Amp Max(16AWG Per Pin)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

A42011R-XXX-01-A

1 2 3 4 5

1: — Series No.

2: — R/R/A Type






3: — No. of Positions

4: — A:Glod flash

Q:Tin Plated

S:Matte tin Plated

5: — A:InBag

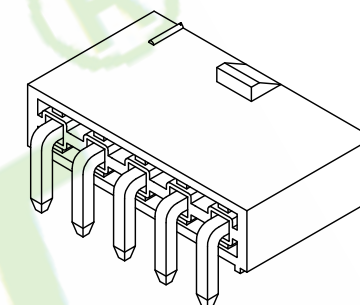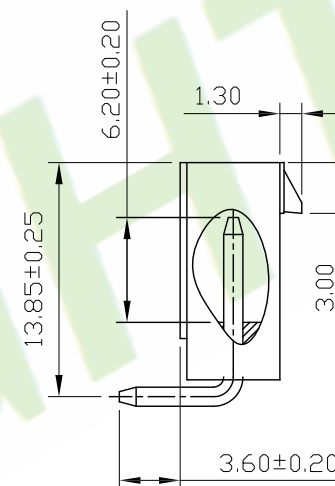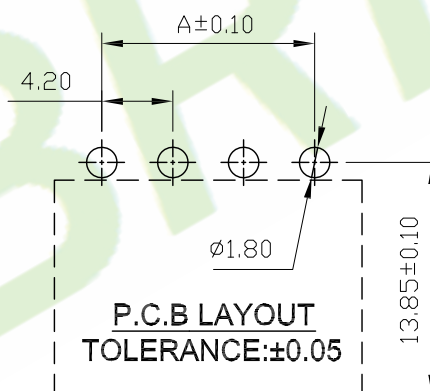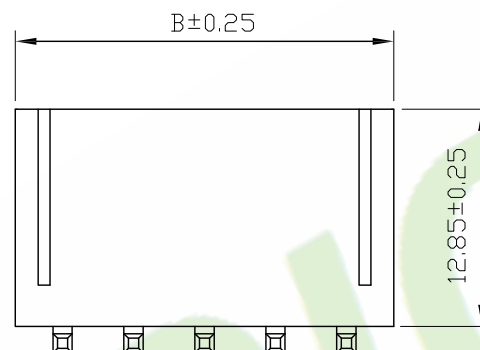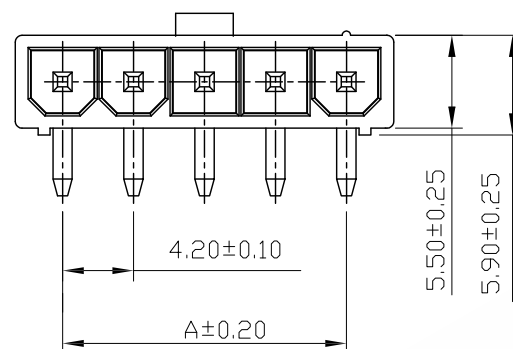

Part No.	Dimensions(mm)	
	A	B
2P	4.20	9.80
3P	8.40	14.00
4P	12.60	18.20
5P	16.80	22.40
6P	21.00	26.60

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A42011R-XXX-01-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Bruce	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.:	x': ±	TITLE :			
2X		Deng	20230701	Tony	x.x: ±0.25	x.x': ±6°	4.2mm Pitch Wafer connector	SHEET: 1/1		A4
1X	ORIGINAL	Bruce		APPD.:	x.xx: ±15	x.xx': ±3°		SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.08	x.xxx': ±2°	DATE: 12-Jan-2014	UNIT: mm		



THIRD ANGLE PROJECTION

A4