

Specifications:**Material And Finish:**

Insulator:PBT,UL94V-0

Contact:Copper alloy

Rating:

Current Rating:7 Amp(18AWG)

Voltage Rating:300V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information**A5004S-XXQ-01-XX**

1 2 3 4 5 6

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — Q: Tin Plated


5: — R: RED

B: BLUE

N: NATURAL

6: — A: In Bag

C: In Tray

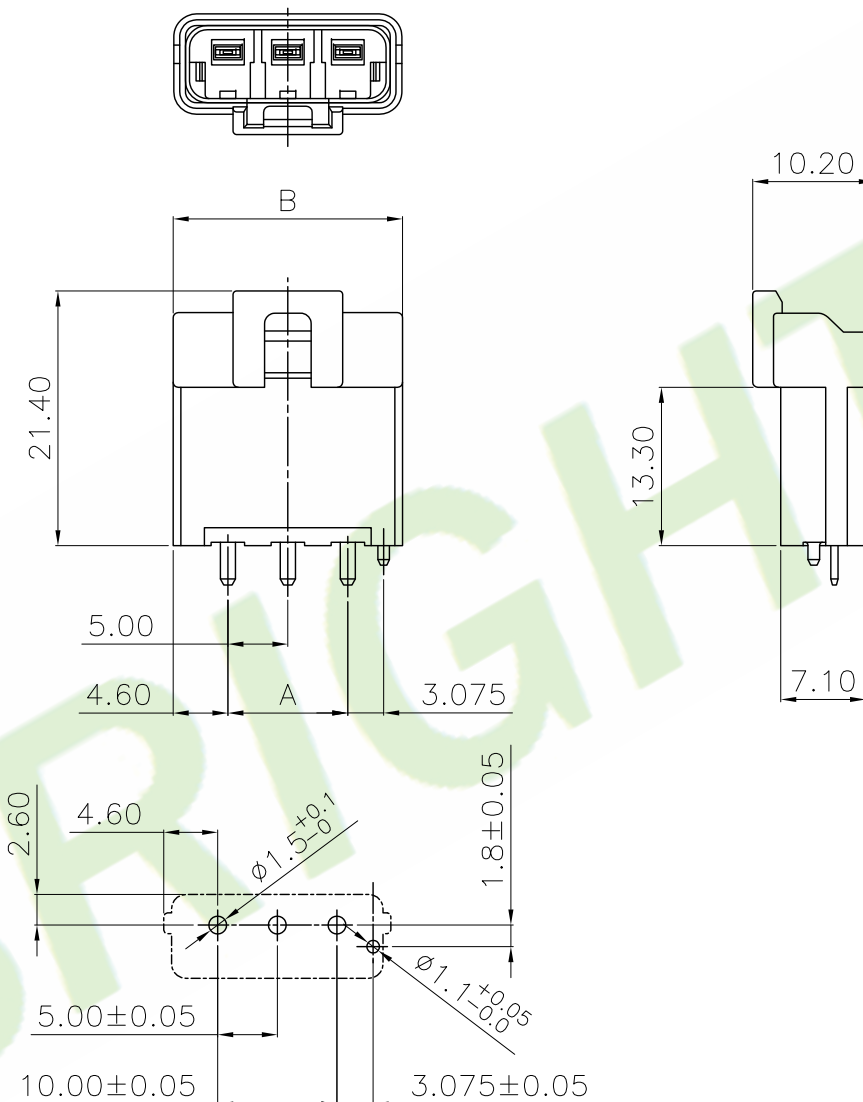

PCB Layout

No.	Dimension mm	
	A	B
2	—	14.2
3	10.0	19.2

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A5004S-XXQ-01-XX		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	X.:	X': ±5.0°	TITLE :				
2X				Aren	X.X: ±0.40	X.X': ±3.0°	5.0mm Pitch 180°WAFER				
1X	ORIGINAL	Judyyan		APPD.:	X.XX: ±0.25	X.XX': ±2.0°	DATE: 11-Jul-2021				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0°					