







Insulator:Nylon66 UL94V-0
Contact:Brass
Plated:See Ordering Information


Current Rating:9.0 Amp
Voltage Rating:500V AC/DC
Operating Temperature Range:-25~+85°C

Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

A51033AS-09X-01-A

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Gold Flash on Contact; Matte Tin on tail
Q: Tin Plated
S: Matte Tin Plated
5:— A: In bag
B: In Tray

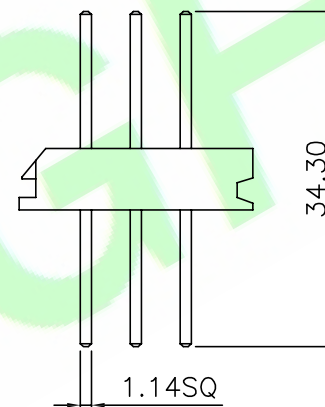

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : A51033AS-09X-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.38	x': ±5.0°	TITLE : TERMINAL ALARM 3X3 POSITINO ASSY				
2X					x.x: ±0.30	x.x': ±3.0°					
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 21-Dec-2016		SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°			SCALE: 1:1		
									UNIT: mm		