

Specifications:

Material And Finish:

Insulator: LCP UL94v-0 Color:Black

Contact:High contactivity copper alloy

Rating:

Current Rating:23Amp AC/DC(12AWG/ Per pin)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max


Insulator resistance:1000M Ohm min.

Withstanding Voltage:2200V AC/Minute

Ordering Information

A5701R-XXS-01-X

- 1: — Series No.
 2: — R:R/A Type
 3: — No. of Positions
 4: — S:Matte Tin Plated
 5: — A:In Bag
 B:In Tube
 C:In Tray

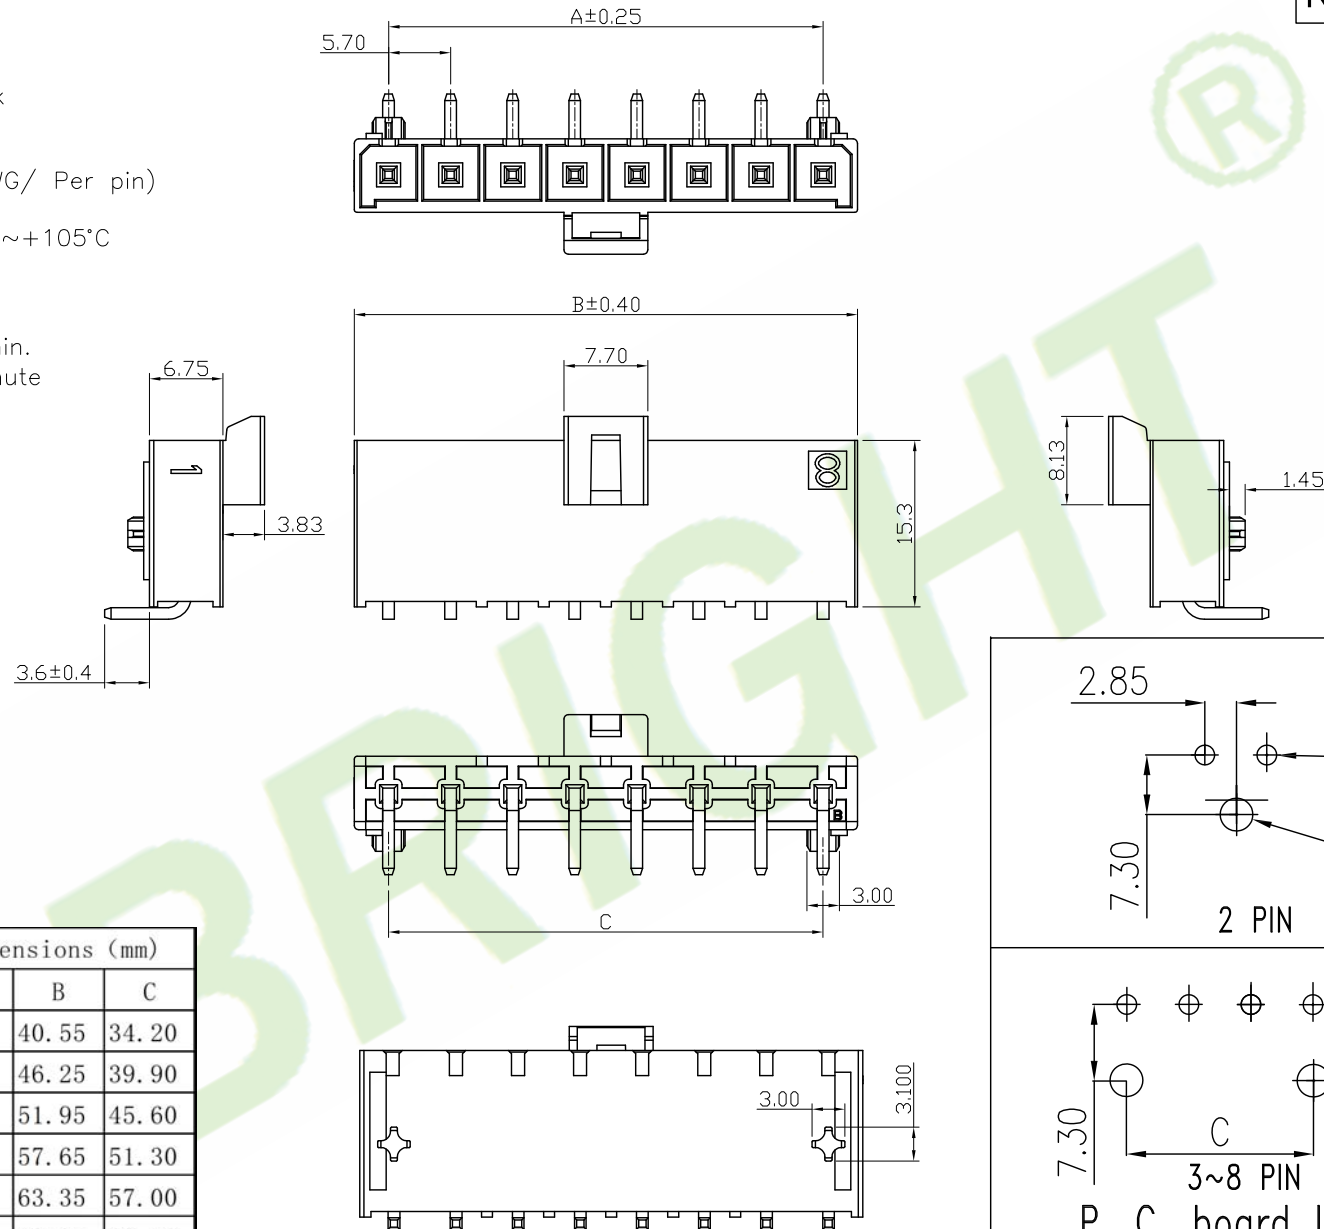


Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02P	5.70	12.05	5.70	07P	34.20	40.55	34.20
03P	11.40	17.75	11.40	08P	39.90	46.25	39.90
04P	17.10	23.45	17.10	09P	45.60	51.95	45.60
05P	22.80	29.15	22.80	10P	51.30	57.65	51.30
06P	28.50	34.85	28.50	11P	57.00	63.35	57.00
07P	34.20	40.55	34.20	12P	62.70	69.05	62.70

5X				DR.BY.:			
4X				Tsw			
3X				CHKD.:			
2X	Update code options	Judyyan	20220728	Mark			
1X	ORIGINAL	Tsw		APPD.:			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy			

GENERAL TOLERANCE:		PART NO A5701S-XXS-01-X
LINEAR	ANGLES	
X.: ±0.30	X': ±5.0°	DWG. NO.:
X.X: ±0.20	X.X': ±3.0°	
X.XX: ±0.15	X.XX': ±2.0°	TITLE :
X.XXX: ±0.10	X.XXX': ±1.0°	
		5.7 Wafer 1*8P Straight Type Single Row
		DATE: 30-Set-2021

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4