

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:13.5 Amp(12AWG)

Voltage Rating:600V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:3.5m Ohm Max

Insulator resistance:1000M ohm min.







Withstanding Voltage:2900V AC/Minute

Ordering Information


A63511S-XXX-03-X

1 2 3 4 5

- 1: — Series No.
2: — S: Straight
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In Bag
C: In Tray

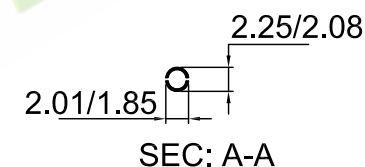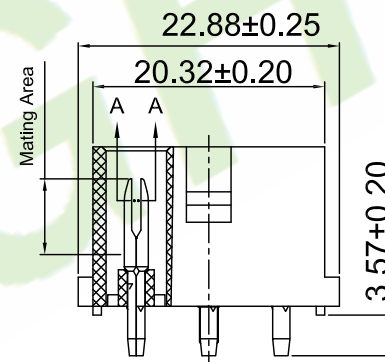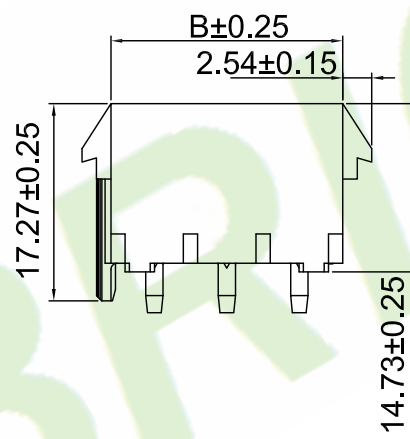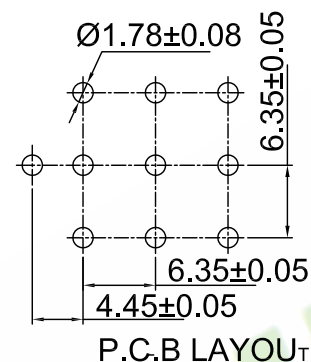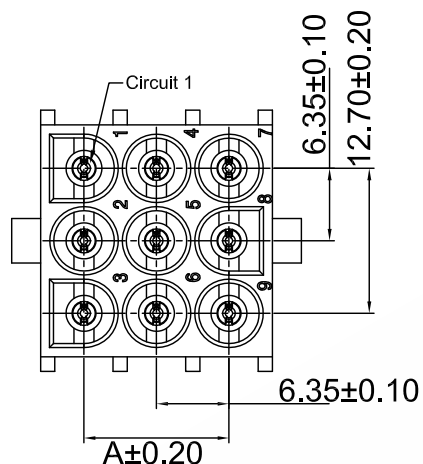

Part NO.	Dimensions(mm)	
	A	B
2P	6.35	13.97
3P	12.70	20.32
4P	19.05	26.67
5P	25.40	33.02

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A63511S-XXX-03-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Kenry	X.: ±0.30	X': ±5.0°	TITLE :	SHEET: 1/1	 A4
2X	ORIGINAL	Samson			X.X: ±0.20	X.X': ±3.0°	6.35mm Pitch Wafer Straight Type	SCALE: 1:1	
1X	ORIGINAL	Samson	A001	APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 04-Jun-2015	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			