

Specifications:**Material And Finish:**

Insulator:Nylon66 UL94V-0 Color:Natural

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:13.5 Amp(12AWG)

Voltage Rating:600V AC/DC




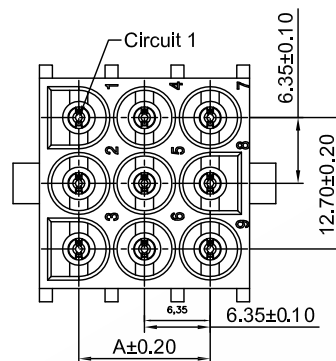
Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:3.5m Ohm Max



Insulator resistance:1000M ohm min.

Withstanding Voltage:2900V AC/Minute

**Ordering Information****A63511S-XXX-X**

1 2 3 4 5

- 1: — Series No.
2: — S: Straight
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In Bag
C: In Tray

**P.C.B LAYOUT****Ordering Information & Dimensions:**

PART NO.	Dimensions	
	A	B
3x2P	6.35	13.97
3x3P	12.70	20.32
3x4P	19.05	26.67
3x5P	25.40	33.02

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A63511S-XXX-X	HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Kenry	x.: ±0.30	x': ±5.0°	TITLE : 6.35mm Pitch Wafer Straight Type	SHEET: 1/1		A4
2X	ORIGINAL	Samson			x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson	A001	APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 04-Jun-2015		
REV	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				