

RoHS Compliant

Specifications:

Material:

Insulator:PA66 UL94V0/V2 Color:Natural

Contact:Brass

Plated:Tin Plated

Rating:

Current Rating:15 Amp

Voltage Rating:600V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.






Withstanding Voltage:5000V AC/Minute

Ordering Information

A6351SF-XXQ-01-XA

1 23 4 5 6 7

- 1:— Series No.
2:— S: Straight Type
3:— F: Female
4:— No. of Positions
5:— Q: Plated Tin
6:— A: PA66 V0
B: PA66 V2
7:— A: In Bag

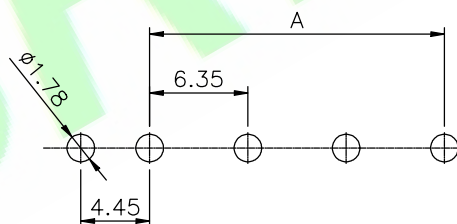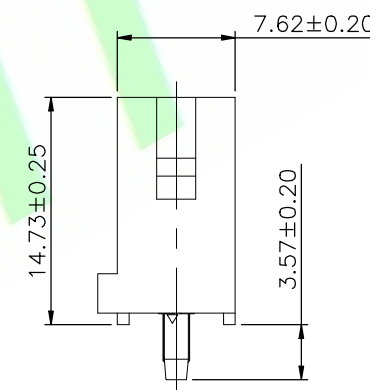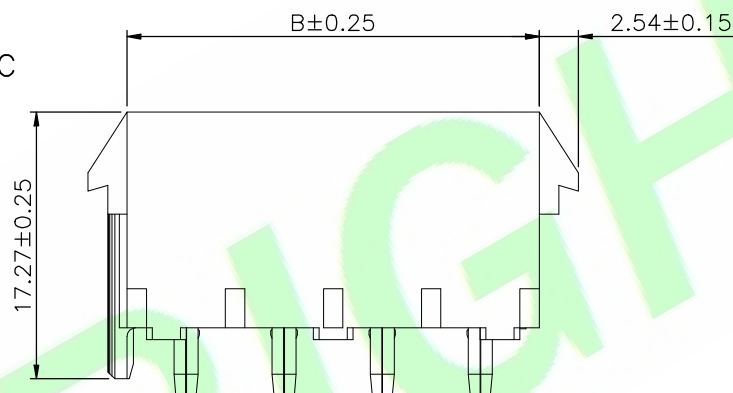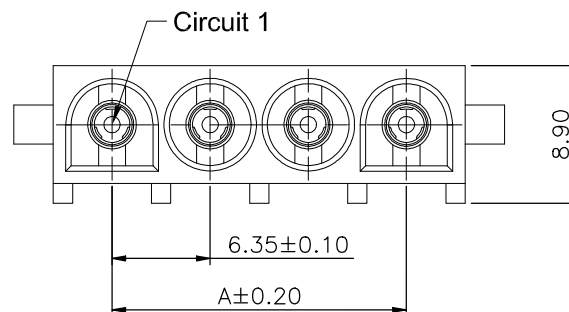

P.C.B LAYOUT

Poles	Dimensions (mm)	
	A	B
2P	6.35	13.97
3P	12.70	20.82
4P	19.05	26.67
5P	25.40	33.02
6P	31.75	39.37
8P	44.45	52.07

DR.BY:

Samson

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : A6351SF-XXQ-01-XA

DWG. NO.:

TITLE :

6.35mm Pitch Straight Type Wafer

DATE: 23-Oct-2013

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Fix PCB Layout	Judyyan	20241114
2X	Update option code	Judyyan	20221028
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.