

Specifications:**Material And Finish:**

Insulator:PA6T

High Temperature Resistant Thermoplastic

UL94V-0 Color:Black

Contact:Copper alloy

Rating:

Current Rating:2.5 Amp,30 Amp

Voltage Rating:400V AC/DC

Operating Temperature Range:-20°~+105°C

Electrical:

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**A6358R-24MH-C**

1 2 3 4 5 6

1: — Series No.


2: — R:R/A Type

3: — No. of Positions






4: — M:Male

5: — H:Selective Plated 30u" Gold
in contact area; Tin In tail area;
Nickel overall


6: — C:In Tray

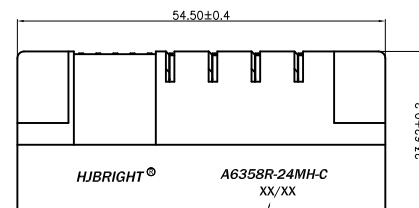

WEEK/YEAR

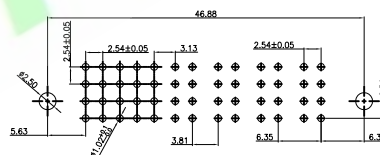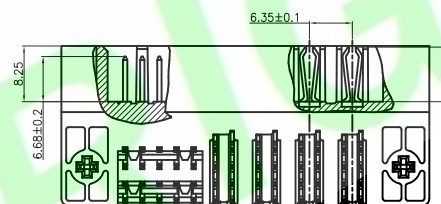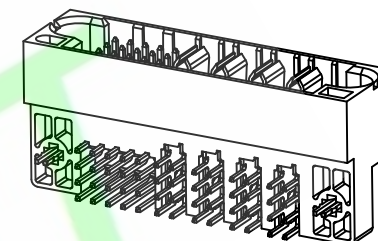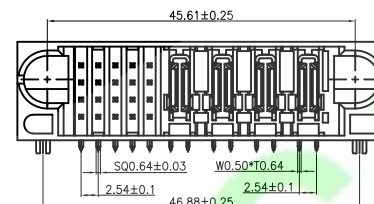

Recommended PCB Layout

5X				DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : A6358R-24MH-C	HJBRIGHT® 华海电子科技有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES					
3X				CHKD.: Ren	x.: ±0.38	x': ±5.0°	TITLE :6.35mm PCB Header P-S CONFIG. MULTI CTRS. R/A Male Power Connector				
2X					x.x: ±0.30	x.x': ±3.0°					
1X	ORIGINAL	Mark		APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx': ±1.0°					
							SHEET: 1/1			A4	
							SCALE: 1:1				
							UNIT: mm				
									THIRD ANGLE PROJECTION		

SHEET: 1/1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION