

Specifications:

Material And Finish:

Insulator:High temp,Thermoplastic UL94V-0

Meets Gwt 850°C 960°C

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B2003R-XXX-01-XX

1 2 3 4 5 6

1:— Series No.

2:— R:R/A Type

3:— No. of Positions(4~50P)

4:— H:Selective Gold Plated

L:15u" Gold on contact;Matte Tin on tail

Y:30u" Gold on contact;Matte Tin on tail





5:— N:Natural

B:Black


6:— B:In Tube

C:In Tray

G:Tape&Reel

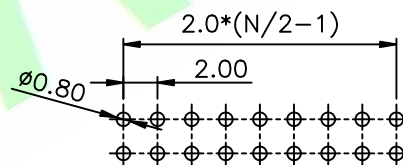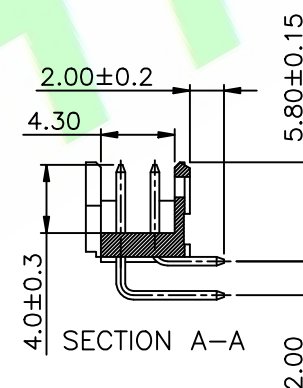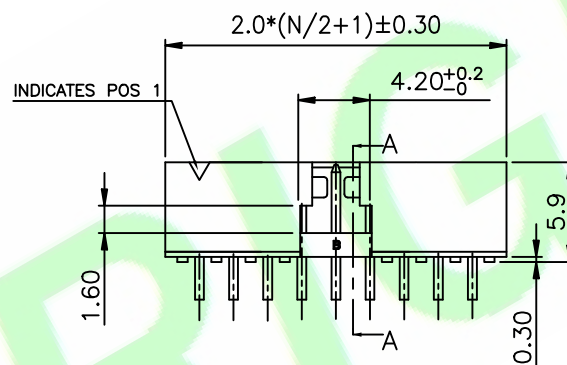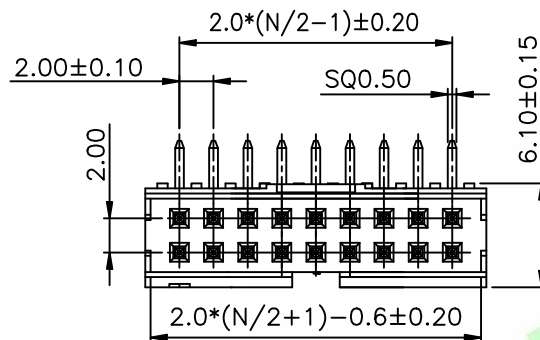

Recommended PCB Layout



4 POSITIONS PRODUCT DESIGN

5X				DR.BY.: Zolin	GENERAL TOLERANCE: LINEAR ANGLES	PART NO : B2003R-XXX-01-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X								
3X				CHKD.: jerry Liu	X.: ±0.30 X': ±5.0°	DWG. NO.:	SHEET: 1/1	THIRD ANGLE PROJECTION
2X					X.X: ±0.20 X.X': ±3.0°			
1X	ORIGINAL	Zolin		APPD.: Peter Li	X.XX: ±0.15 X.XX': ±2.0°	TITLE : Box Header R/A Type	SCALE: 1:1	A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10 X.XXX': ±1.0°			
	1	2	3		4	5	6	7
								8



THIRD ANGLE PROJECTION