

Specifications:

Material And Finish:

Insulator:Nylon PA66 UL94V-0 Color:Black.

Contact:Phosphor Bronze.

Plated:See Ordering Information.

Rating:

Current Rating:30 Amp.

Operating Temperature Range:-30°~+85°C.

Electrical:

Insulator resistance:DC 1000V/100M ohm.

Contact resistance:Power PIN 5m Ohm Max.

Signal PIN 10m Ohm Max.

Withstanding Voltage:Power PIN 2500V AC/Minute






Signal PIN 1000V AC/Minute

Ordering Information

BC6001S-06NM-01-A

1 2 3 4 5 6

- 1: — Series No.
 2: — S: Straight Type
 3: — No. of Positions
 4: — N: Nicke
 5: — M: Male
 6: — A: In Bag

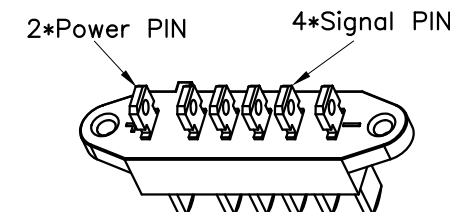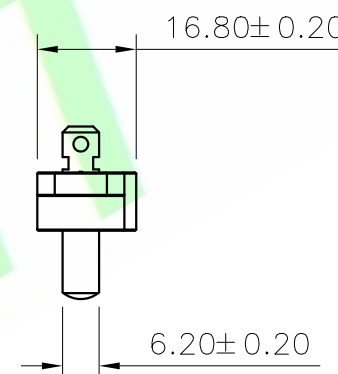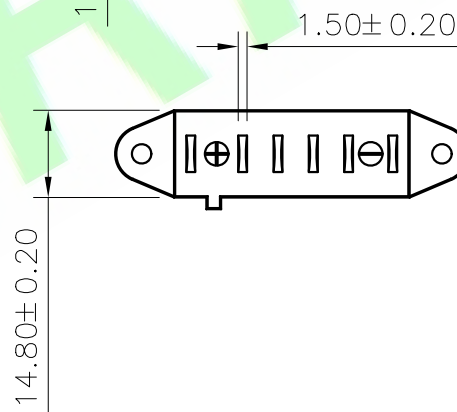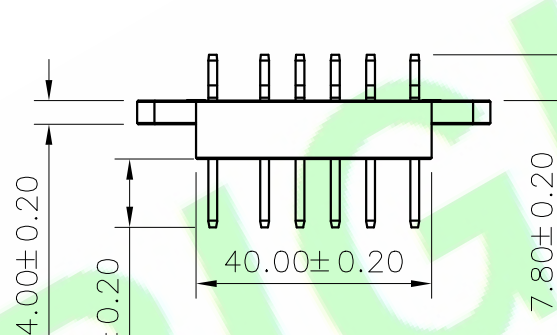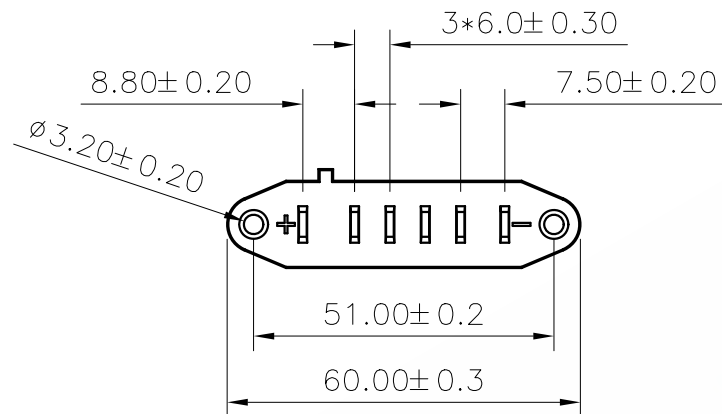

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : BC6001S-06NM-01-A	
CHKD.: Judyyan	LINEAR	ANGLES	DWG. NO.:	
	x.:	x': ±3.0°	TITLE :	
	x.x: ±0.20	x.x': ±3.0°	Battery vertical male connectors	
	x.xx: ±0.10	x.xx': ±3.0°		
APPD.: Billy	x.xxx: ±0.05	x.xxx': ±3.0°	DATE: 17-Jun-2013	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO