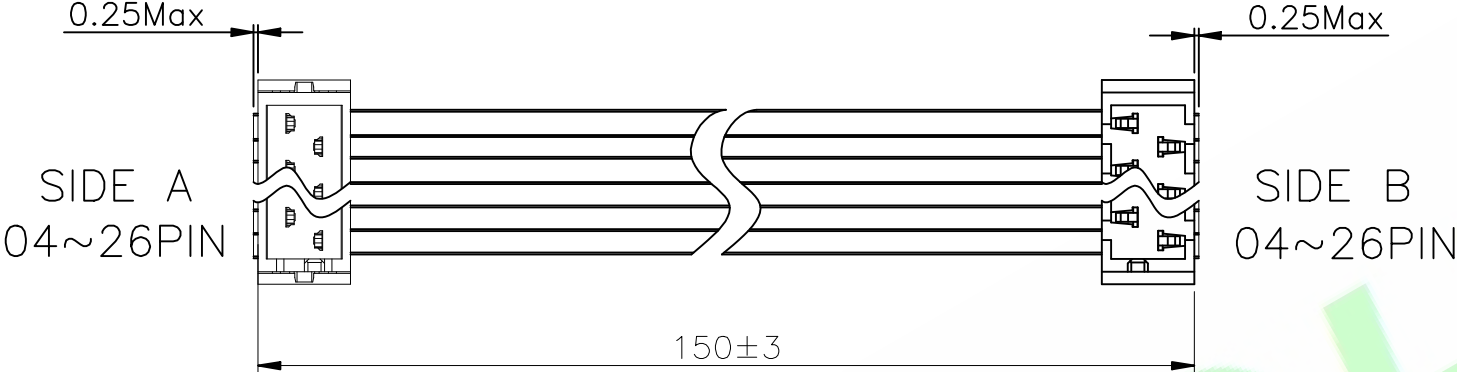


Ordering Information
C2542-XXQ-XXX-02

- 1 2 3
- 1: — Series No.
2: — No. of Positions
04: 2*2PIN
06: 2*3PIN
.....
26: 2*13PIN
3: — Wire Length
105: L=105mm
110: L=110mm
.....

Notes:


1. Connector must be mounted 90°±1° to Cable.
2. Ensure connectors are installed fully seated.
3. Adjacent conductors must not be shorted
4. Trim cable flush with connectors ensuring ends of conductors are not frayed.

3	Cable Wire	UL2651 28AWG PH1.27mm 105°C 300V VW-1	Wenchang	PER DESCRIPTION		L mm
2	IDC	2.54mm Pitch IDC 2*NP Red	BRIGHT	DP2541-XXQ-01-A		1PCS
1	DIP IDC	2.54mm Pitch DIP IDC 2*NP Red	BRIGHT	DP2542-XXQ-01-A		1PCS
ITEM	Part name	Description	Manufacturer	Manufacturer P/N	Color	QTY

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : C2542-XXQ-XXX-02	
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:	
	1~150: ±3	X: ±5.0°	TITLE :	
	150~300: ±5	X.X: ±3.0°	CABLE ASSY, Micro-Match MOW-PCB	
APPD.: Billy	300~450: ±10	X.XX: ±2.0°	DATE: 1-Nov-2024	
		X.XXX: ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.