

Specifications:

Material And Finish:

Insulator:PBT UL94V-0, BLACK

Contact:Brass

Crust:Steel,Plated Ni

Screw:Steel,Plated Ni

Rating:

Current Rating:5A Amp

Voltage Rating:500V

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:25m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

DB07R-XXFX-XX-XH

1 2 3 4 5 6 7

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—F:Female

5:—5:Contact Gold flash/Tail Sn120u"~200u"

6:Contact 10u" Gold/Tail Sn120u"~200u"

7:Contact 15u" Gold/Tail Sn120u"~200u"

8:Contact 30u" Gold/Tail Sn120u"~200u"

6:—01:W/O Screw

02:With Screw






03:Screw Rivet

04:Reverse Rivet

7:—A:In Bag

B:In Tube

C:In Tray

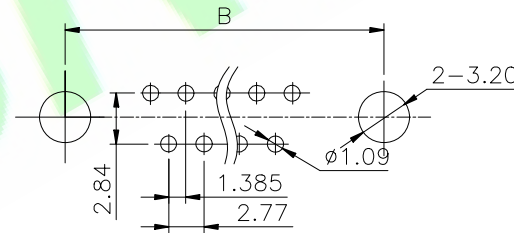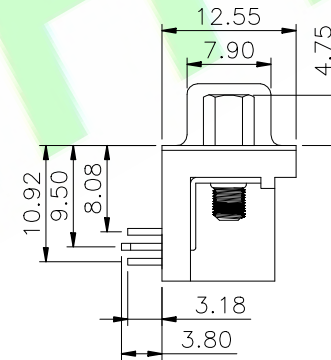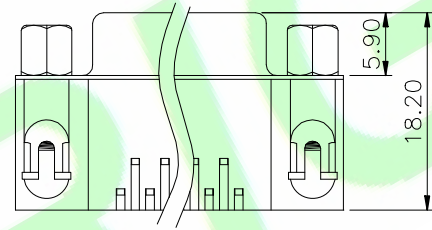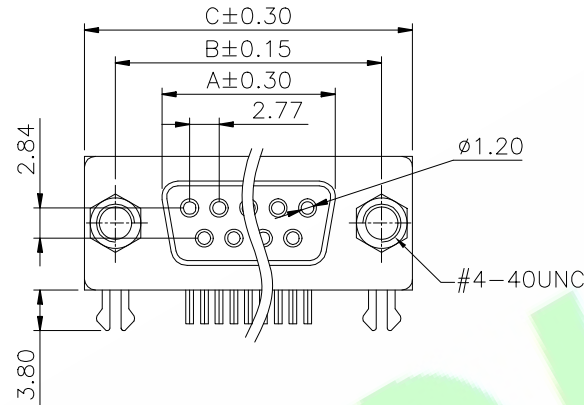

RECOMMENDED PCB LAYOUT

01: W/O Screw

02: With Screw

03: Screw Rivet

04: Reverse Rivet

P/N	A	B	C
DB07R-09FX-XX-XH	16.30	24.99	30.80
DB07R-15FX-XX-XH	24.60	33.30	39.20
DB07R-25FX-XX-XH	38.30	47.04	53.10
DB07R-37FX-XX-XH	54.80	63.50	69.34

5X			
4X			
3X			
2X			
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:

Kenry

CHKD.:

Tony

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR ANGLES

X.: ±0.50 X': ±3.0°

X.X: ±0.38 X.X': ±2.0°

X.XX: ±0.25 X.XX':

X.XXX: X.XXX':

PART NO : DB07R-XXFX-XX-XH

DWG. NO.:

TITLE :

D-SUB HD,RIGHT ANGLE ,SOLDER TAIL FEMALE

DATE: 24-Jul-2015

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4