

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT+30% UL94V-0 Colour:Black

Contact:Brass

Shell:Steel With Nickel Plated.

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp



Operating Temperature Range:-55°~+105°C

Electrical:



Contact resistance:30m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

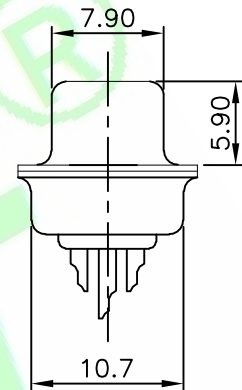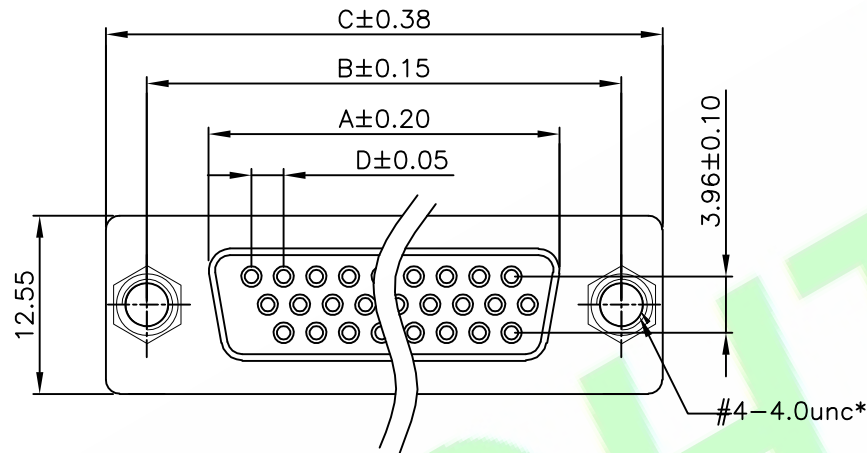

01:A Type

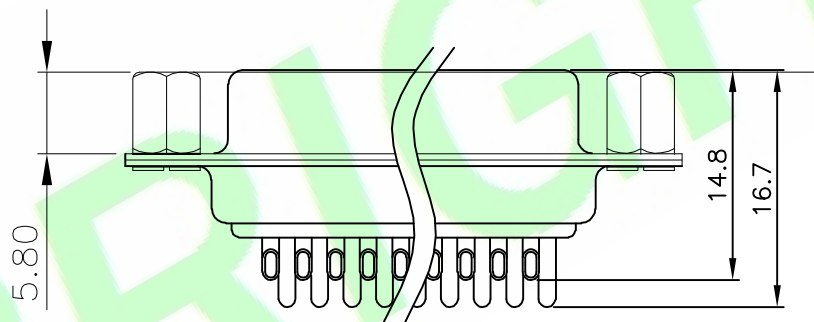

02:B Type

Ordering Information

DSH01S-XXF5-XX-CH

1 2 3 4 5 6 7 8

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — F: Fe Male

5: — 5: Selective Gold Plated

6: — 01:A Type

02:B Type

7: — C: In Tray

8: — H: 48 hours Salt Spray


PIN	A	B	C	D
15	16.30	24.99	30.80	2.29
26	24.60	33.30	39.20	2.29
44	38.30	47.04	53.10	2.29
62	54.80	63.50	69.34	2.41

5X			
4X			
3X			
2X	Update code options	Judyyan	20220829
1X	ORIGINAL	Jack	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Jack
CHKD.: Kenry
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.38	X': ±5.0°
X.X: ±0.35	X.X': ±3.0°
X.XX: ±0.25	X.XX': ±2.0°
X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : DSH01S-XXF5-XX-CH
DWG. NO.:
TITLE : D-SUB 高密度 母头焊线式前锁5.8实心螺母
DATE: 27-Oct-2017

HJBRIGHT ® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		