

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT+30% UL94V-0 Color:Black

Contact:Brass

Shell:Steel With Nickel Plated.

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp



Operating Temperature Range:-55°~+105°C

Electrical:


Contact resistance:30m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:1000V AC/Minute

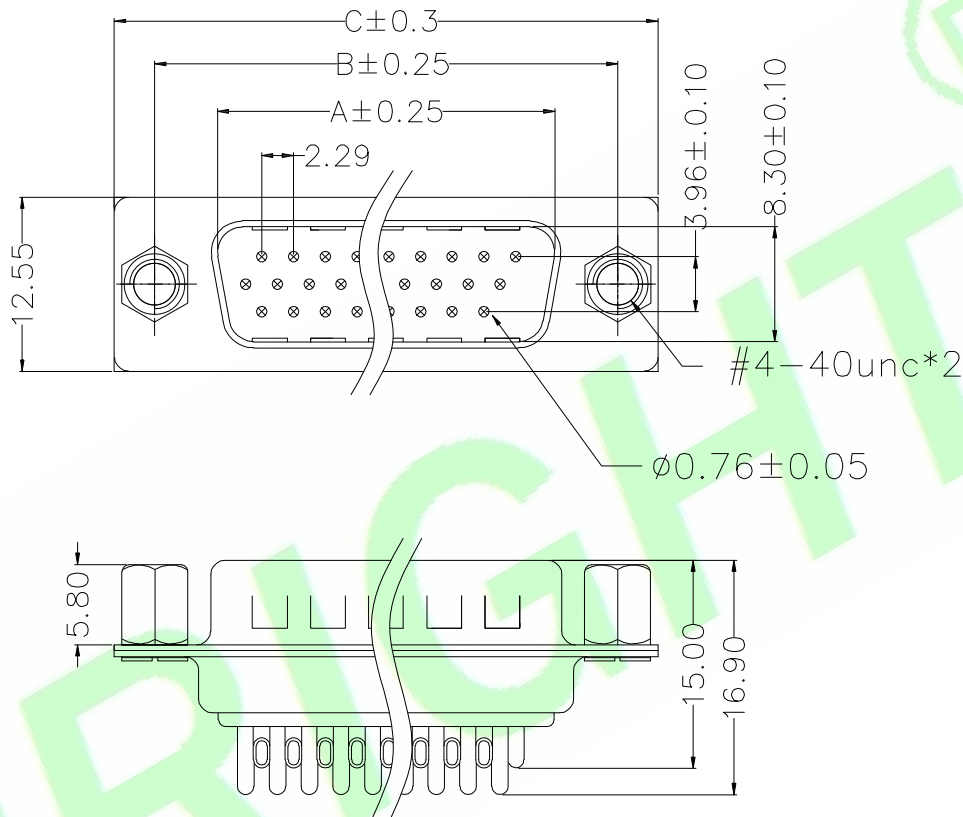

01: A Type

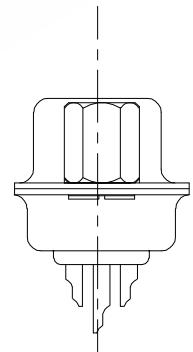

02: B Type

Ordering Information

DSH01S-XXM5-XX-CH

1 2 3 4 5 6 7 8


- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — M: Male
- 5: — 5: Selective Gold Plated
- 6: — 01: A Type
02: B Type
- 7: — C: In Tray
- 8: — H: 48 hours Salt Spray

PIN	A	B	C
15	16.90	24.99	30.80
26	25.25	33.30	39.20
44	38.96	47.04	53.10
62	55.42	63.50	69.34

5X			
4X			
3X			
2X	Update code options	Judyyan	20220829
1X	ORIGINAL	Jack	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Jack	GENERAL TOLERANCE:	
CHKD.: Kenry	LINEAR	ANGLES
APPD.: Billy	X.: ±0.38	X': ±5.0°
	X.X: ±0.35	X.X': ±3.0°
	X.XX: ±0.25	X.XX': ±2.0°
	X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : DSH01S-XXM5-XX-CH
DWG. NO.:
TITLE :
D-SUB 高密度 公头焊线式前锁5.8实心螺母
DATE: 27-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		