

Specifications:**Material And Finish:**


Insulator:PA66+15%GF UL94V-0 Color:Black
Contact:Copper Alloy

Rating:

Current Rating:50 Amp
Rated Voltage:600V
Operating Temperature Range:-40°~+120°C


Electrical:

Insulator resistance:1000M ohm min.
Dielectric Voltage:500V AC/Minute
Wire Range: #8~18AWG

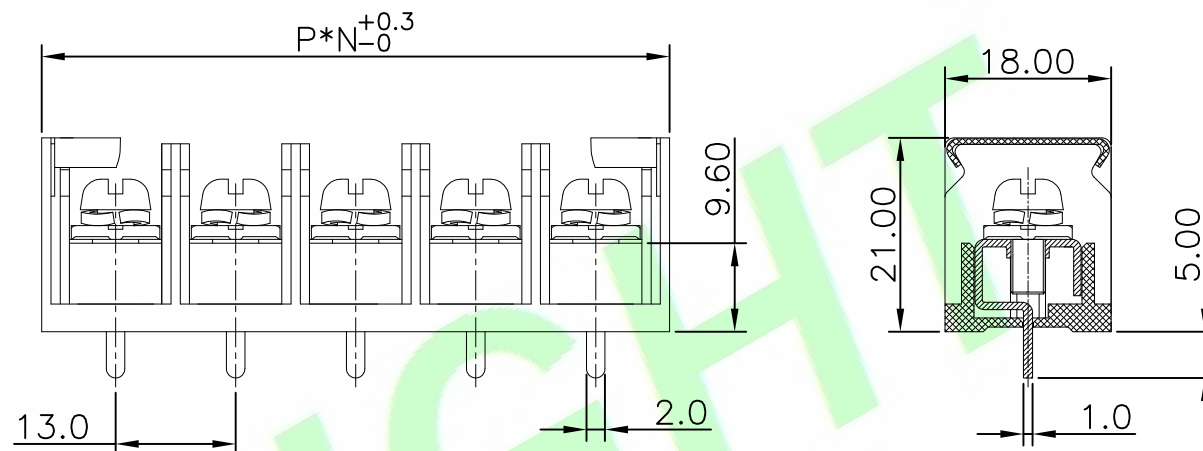**Ordering Information****DZT13S-XXQ-01-C**

1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— Q: Tin Plated
5:— C: In Tray

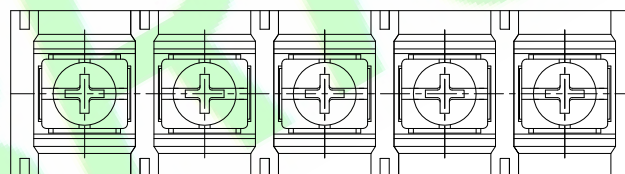

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : DZT13S-XXQ-01-C		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: x.x: ±0.35	x': ±5.0° x.x': ±3.0°	TITLE : 13.0mm Pitch Terminal Block		SHEET: 1/1			A4
2X					x.xx: ±0.25	x.xxx: ±2.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xxx: ±0.15	x.xxx': ±1.0°	DATE: 14-Oct-2021		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.									