

Joint and several

Specifications:wire Range: 16-14AWG 1.5-2.5MM²

Material: Braass

Insulation/Color: Nylon 94V-2/BLUE

Surface Treatment: Tin plated

Unmarked dimensional tolerance is ± 0.3 , ANGLE
UNITS $\pm 5^\circ$

Connection Table: 6.3*0.8MM

Pack Q' TY: 2000PCS/REEL



Electrical:


Max voltage Temperature: 600V 105°C

Ordering Information**FLDNY2035-01-SR-NBL**

1 23 4

- 1:— Series No.
2:— S:Mattr Tin plated
3:— R:CONTINUOUS STRIP ON REELS
4:— Nylon94V-2/blue

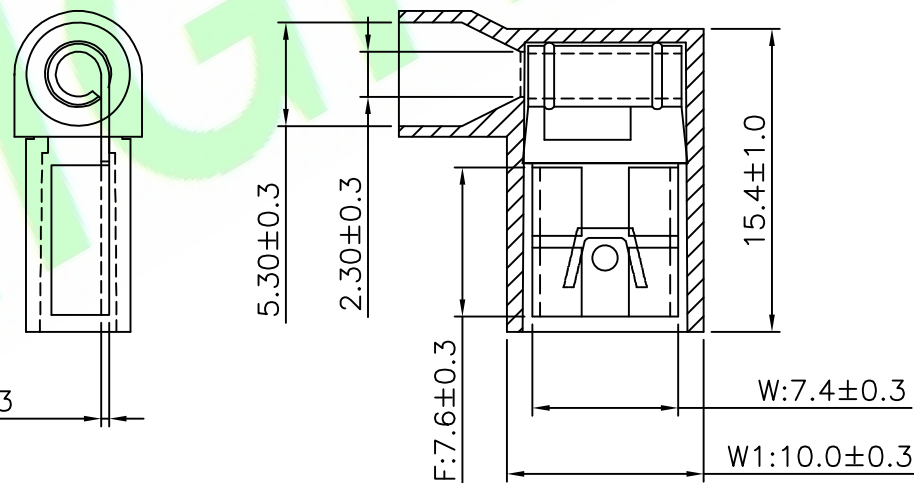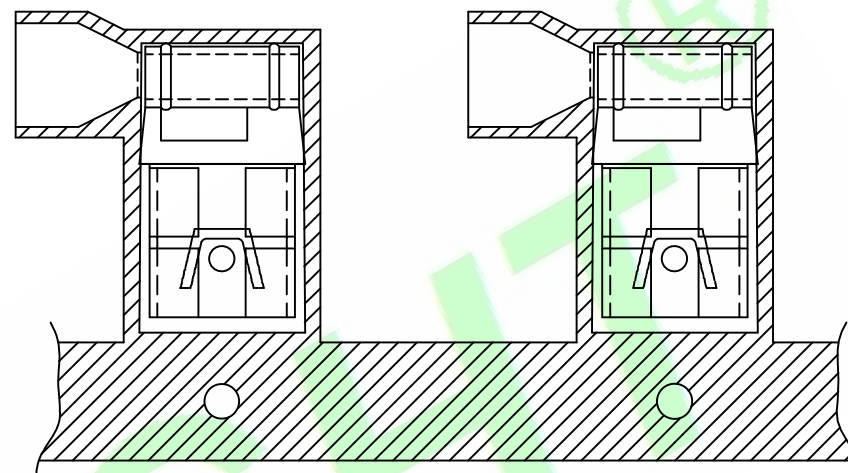

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : FLDNY2035-01-SR-NBL		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Apeng	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : Cold press insulated terminal		SHEET: 1/1			A4
2X				Aren	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Apeng		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 18-APR-2023		THIRD ANGLE PROJECTION			