

A

[illegible]


--	--

[illegible][illegible][illegible]

B-

1

[illegible]


[illegible][illegible][illegible]


--

[illegible][illegible]

1

D

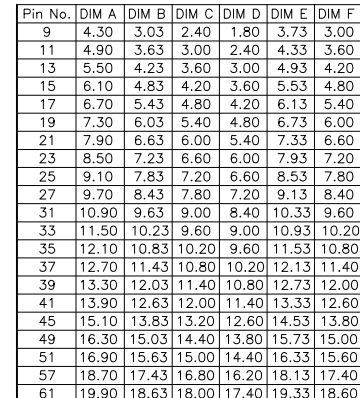[illegible][illegible][illegible]

HJBRIGHT		東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION		A4

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED


A4

THIRD ANGLE PROJECTION

UNIT: mm

THIRD ANGLE PROJECTION




Packing specification

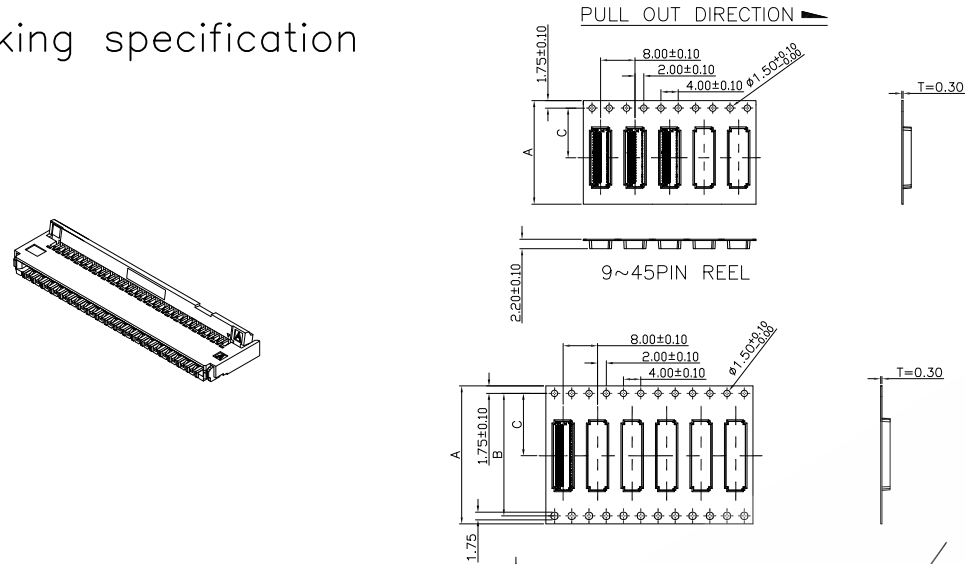


NOTES:

- MATERIAL:
 - CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
 - REEL:HIPS,
 - SHIM:PE,CLEAR.
- PRIMARY PACKING:3000PCS/REEL.
- SECONDARY PACKING:SEE PACKING LIST
- PEELING RESISTANCE: 0.1~1.3N(10~130gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

NO. OF POS.	A	B	C	PCS/REEL
9~19 PIN	16.0	—	7.5	3000
21~45 PIN	24.0	—	11.5	3000
47~61 PIN	32.0	28.4	14.2	3000

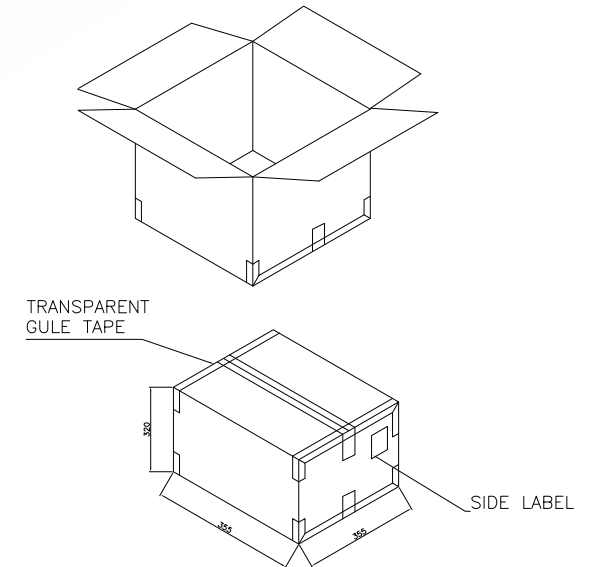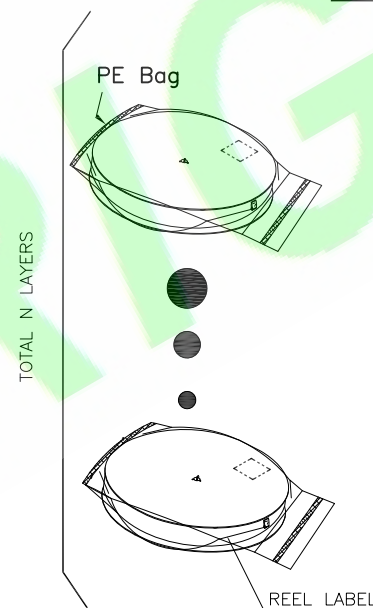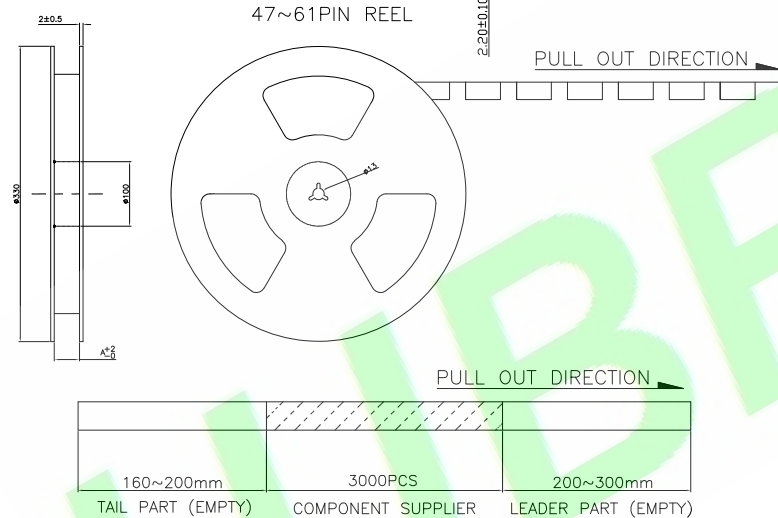

5X				DR.BY: Joy chen	GENERAL TOLERANCE:		PART NO : FP030-09-XXX-01-G	<div>HJBRIGHT</div> <div>東莞市華晶電子有限公司</div> <div>BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED</div>		
4X						LINEAR	ANGLES			
3X				CHKD.: DW	X.: ±0.30	x': ±5.0°	TITLE : 0.30mm Pitch FPC SMT Type H:0.9mm Packing specification	SHEET: 1/1		A4
2X					X.X: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Joy chen	30-Aug-2011	APPD.: Sam	X.XX: ±0.15	x.xx': ±2.0°	DATE: 30-Aug-2011	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	x.xxx': ±1.0°				