

RoHS Compliant

Specifications:

Material:

Insulator: PA66 UL94V-0, Color: White

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: -40~+105°C


Electrical:

Contact resistance: 20m ohm Max

Insulator resistance: 100M ohm min

Withstanding Voltage: 500V AC/Minute

Packaging Type: 1000Pcs/Bag

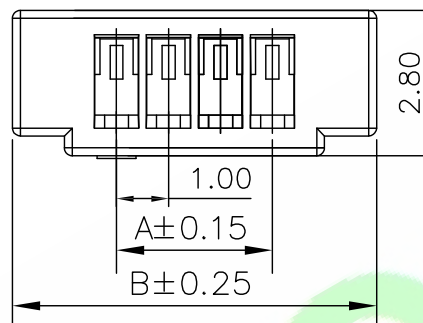



Ordering Information

H1001-XXP-A
1 2 3

1: — Series No.

2: — No. of Positions

3: — A: Bag

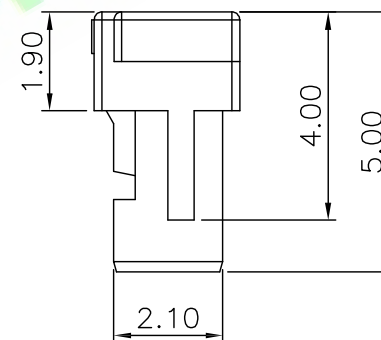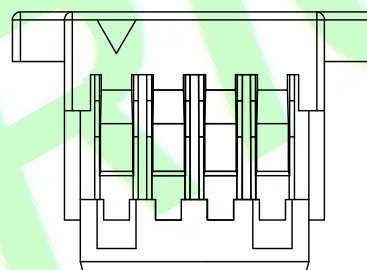

Circuits	Dimensions(mm)	
	A	B
02	1.00	5.00
03	2.00	6.00
04	3.00	7.00
05	4.00	8.00
06	5.00	9.00
07	6.00	10.00
08	7.00	11.00
09	8.00	12.00
10	9.00	13.00
11	10.00	14.00
12	11.00	15.00
13	12.00	16.00
14	13.00	17.00
15	14.00	18.00
20	19.00	23.00

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H1001-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x*: ±5.0°	TITLE : 1.0mm Pitch Housing		SHEET: 1/1		A4
2X					x.x: ±0.20	x.x*: ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°	DATE: 23-Sep-2014		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10			x.xxx*: ±1.0°		