

RoHS Compliant

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0

Color: Natural

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 125V AC/DC



Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

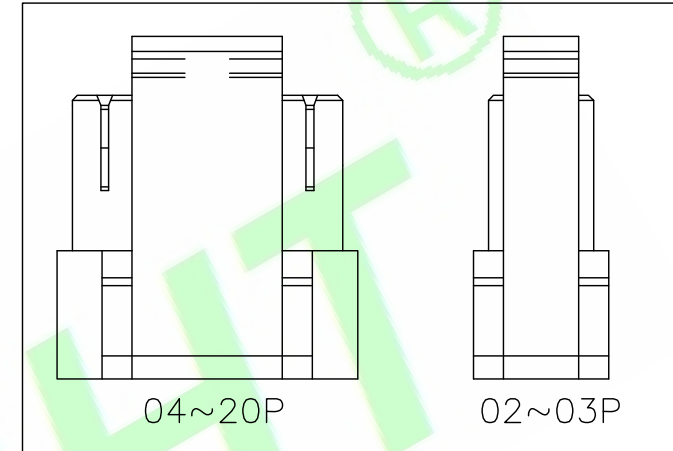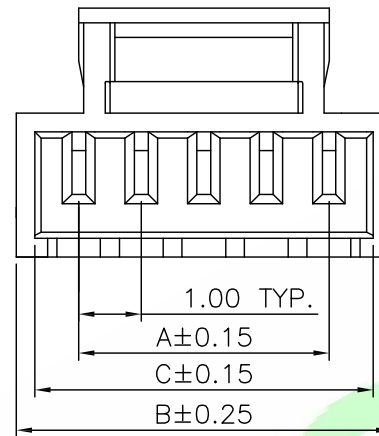

Ordering Information



H1002-XXP-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A: In Bag

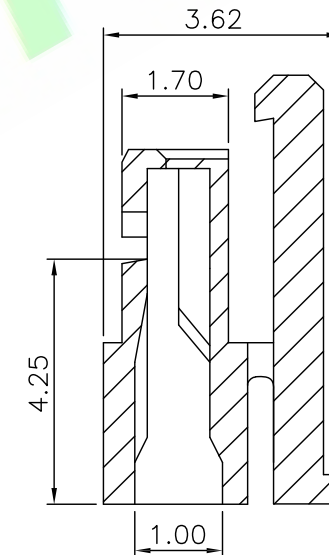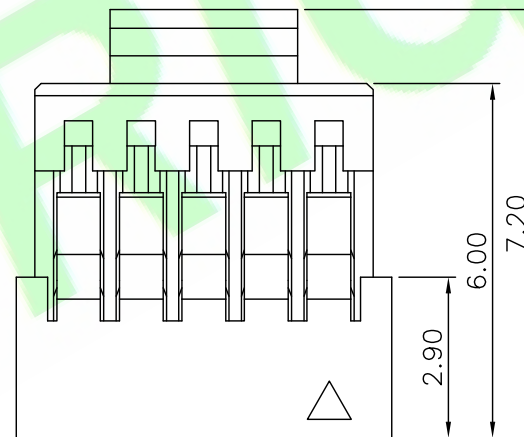

Circuits	Dimensions		
	A	B	C
02	1.00	3.00	2.40
03	2.00	4.00	3.40
04	3.00	5.00	4.40
05	4.00	6.00	5.40
06	5.00	7.00	6.40
07	6.00	8.00	7.40
08	7.00	9.00	8.40
09	8.00	10.00	9.40
10	9.00	11.00	10.40
11	10.00	12.00	11.40
12	11.00	13.00	12.40
13	12.00	14.00	13.40
14	13.00	15.00	14.40
15	14.00	16.00	15.40
16	15.00	17.00	16.40
17	16.00	18.00	17.40
18	17.00	19.00	18.40
19	18.00	20.00	19.40
20	19.00	21.00	20.40

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H1002-XXP-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES				
3X				CHKD.: Tony	X:	X': ±5.0°	BURY P/N:			
2X	Update code options	Judyyan	20220812	APPD.: Billy	X.X: ±0.30	X.X': ±3.0°	TITLE :	SHEET: 1/1		A4
1X	ORIGINAL	Samson			X.XX: ±0.20	X.XX': ±2.0°	1.0mm Pitch Crimp Style For Housing	SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 21-Oct-2017	UNIT: mm	THIRD ANGLE PROJECTION		

A4