
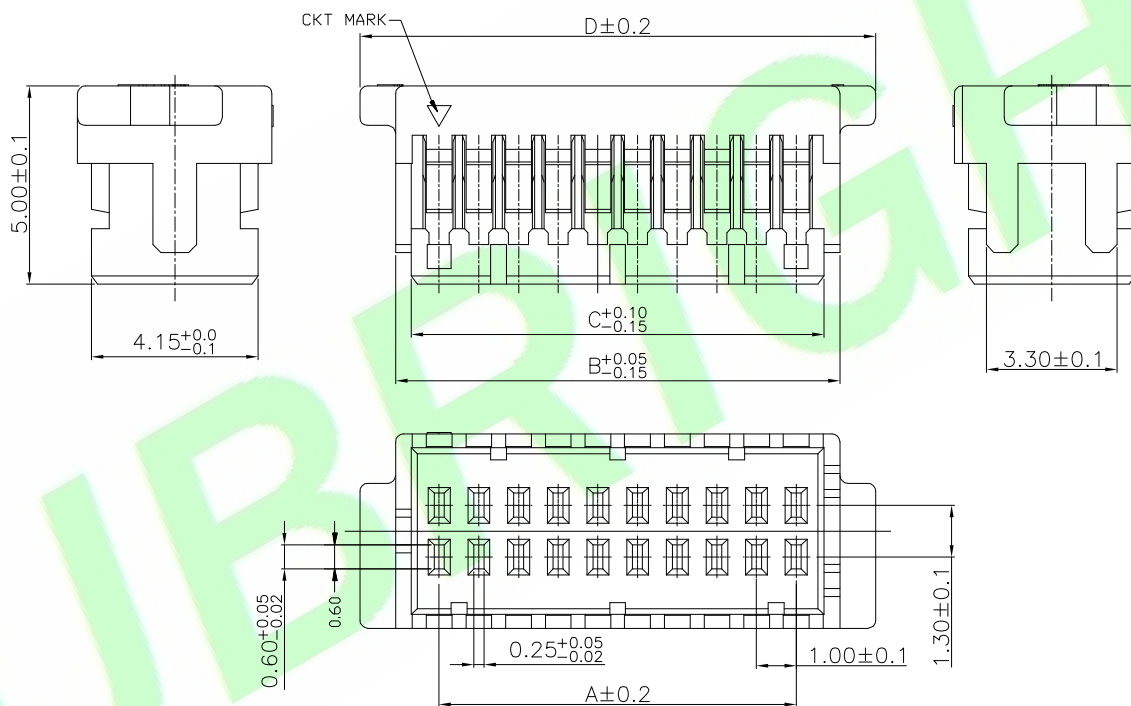



Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Color:Natural

Ordering Information
H10022-XXP-A

1: Series No.
3: No. of Positions
4: A:Bag

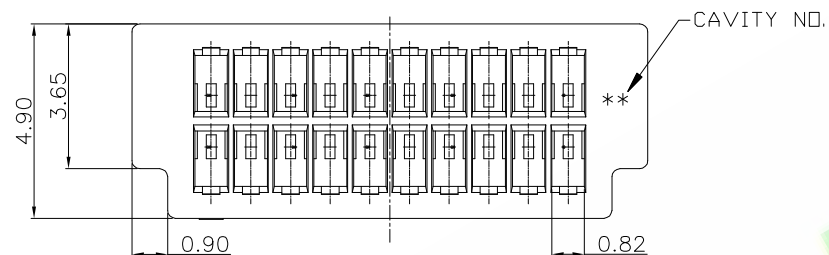

No.	A	B	C	D
08	3.00	5.20	4.40	7.0
10	4.00	6.20	5.40	8.0
12	5.00	7.20	6.40	9.0
16	7.00	9.20	8.40	11.0
18	8.00	10.20	9.40	12.0
20	9.00	11.20	10.40	13.0
24	11.00	13.20	12.40	15.0
28	13.00	15.20	14.40	17.0
30	14.00	16.20	15.40	18.0
34	16.00	18.20	17.40	20.0
40	19.00	21.20	20.40	23.0
50	24.00	26.20	25.40	28.0
60	29.00	31.20	30.40	33.0

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H10022-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	BURY P/N:				
3X				CHKD.: Tony	x.: x.x: ±0.30	x°: ±5.0° x.x°: ±3.0°	TITLE : 1.0mm Pitch Crimp Style For Housing		SHEET: 1/1		A4
2X	To perfect the drawings	Judyyan	20220718	APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°			SCALE: 1:1		
1X	ORIGINAL	Samson			x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 21-Oct-2017	UNIT: mm	THIRD ANGLE PROJECTION		
REV	DESCRIPTION	DR.BY	ECN. NO.								

A4