

Specifications:

Material And Finish:

Insulator: PA66 UL94V-0, Color: Natural

Plated: See Ordering Information

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute






Ordering Information

H10026-XXP-A1 2 3

1: —Series No.

2: —No. of Positions

3: —A: In Bag

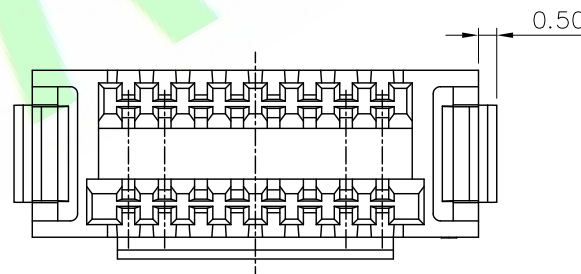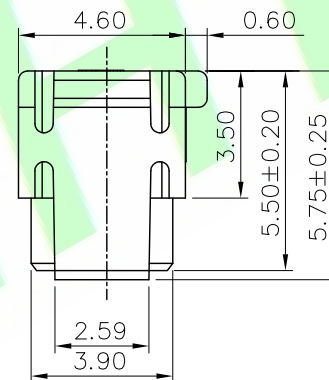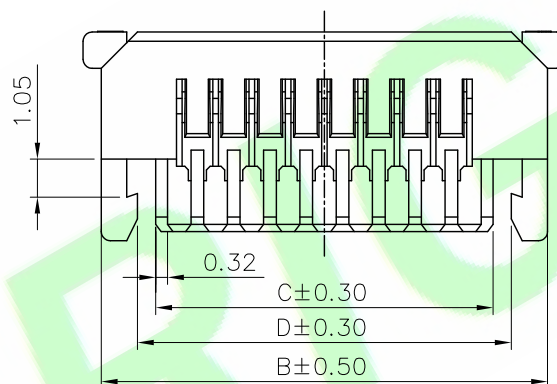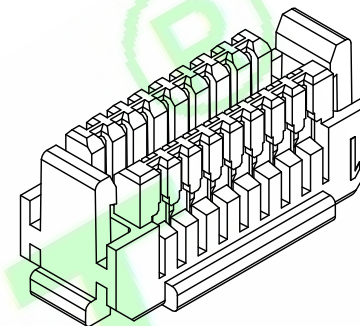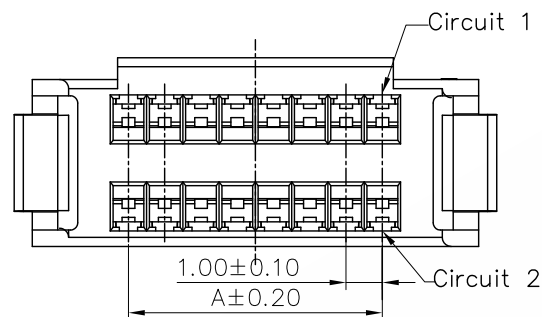


Circuits	Dimensions			
	A	B	C	D
10	4.00	9.30	6.30	7.30
16	7.00	12.30	9.30	10.30
20	9.00	14.30	11.30	12.30
30	14.00	19.30	16.30	17.30
40	19.00	24.30	21.30	22.30
50	24.00	29.30	26.30	27.30
60	29.00	34.30	31.30	32.30

5X			
4X			
3X			
2X	Update code options	Judyyan	20220816
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Samson
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X:	X: $\pm 5.0^{\circ}$
X.X: ± 0.30	X.X: $\pm 3.0^{\circ}$
X.XX: ± 0.20	X.XX: $\pm 2.0^{\circ}$
X.XXX: ± 0.10	X.XXX: $\pm 1.0^{\circ}$

PART NO : H10026-XXP-A
BURY P/N:
TITLE : 1.0mm Pitch Housing
DATE: 05-Oct-2017

HJBRIGHT 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		