

RoHS Compliant

Specifications:

Material And Finish:

Insulator: PA46 UL94V-0, Color: Natural

Shell: Phosphor Bronze

Plated: See Ordering Information

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 200V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Electrical:

Contact resistance: 40m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information



H1006-XXP-A

1 2 3

1: —Series No.

2: —No. of Positions

3: —A: In Bag

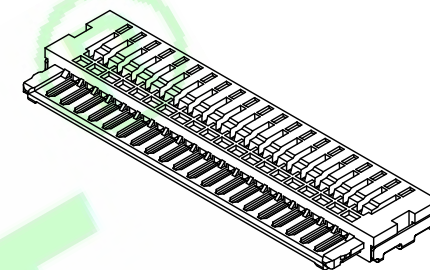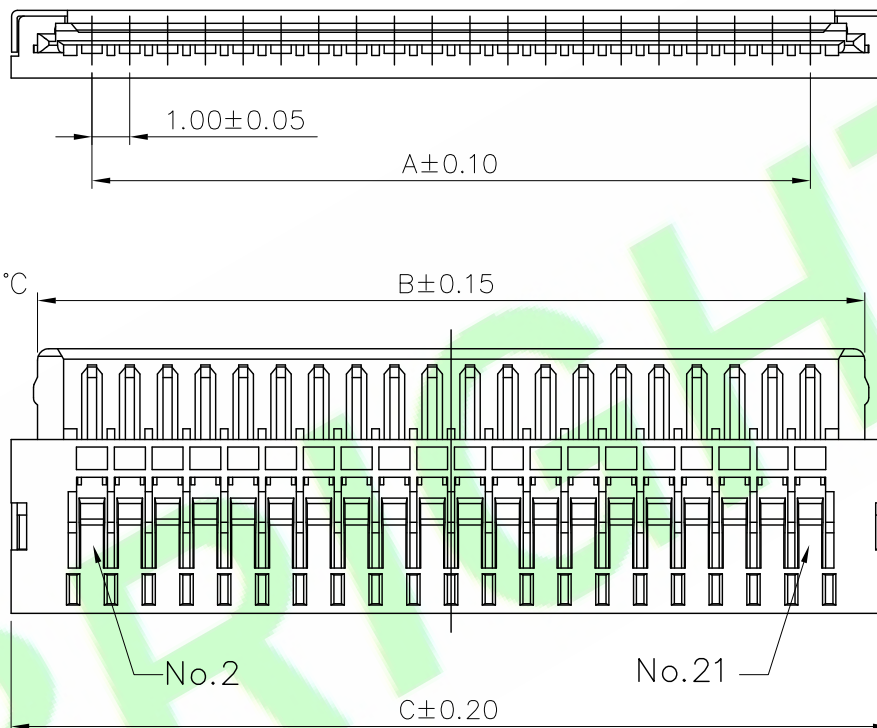


Circuits	Dimensions		
	A	B	C
20	19.00	21.88	23.28
30	29.00	31.88	33.28

5X				DR.BY:	
4X				Samson	
3X				CHKD.:	
2X				Tony	
1X	ORIGINAL	Samson		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H1006-XXP-A
BURY P/N:
TITLE :
1.0mm Pitch Housing
DATE: 21-Oct-2017

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1: 1		
UNIT: mm		
THIRD ANGLE PROJECTION		