

Specifications:

Material:

Insulator: LCP UL94V-0 Color: Black

Rating:

Current Rating: 1.5 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information







H1200-XXP-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A: In Bag

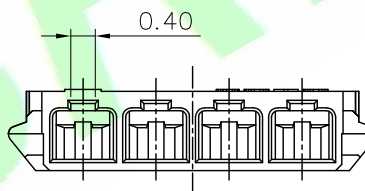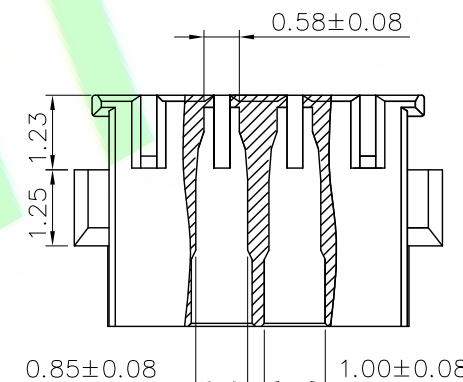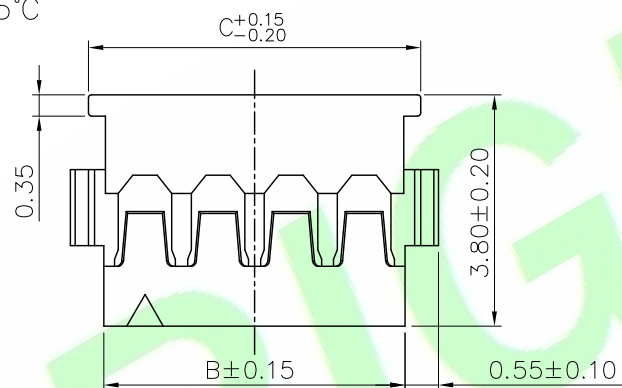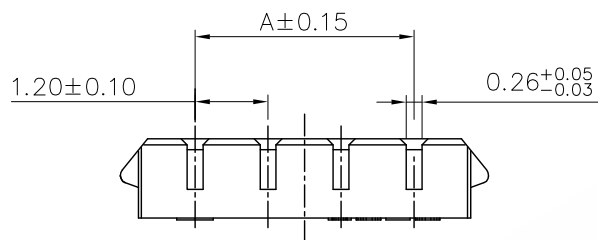

Circuits	Dimension mm		
	A	B	C
02	--	2.60	3.10
03	2.40	3.80	4.30
04	3.60	5.00	5.50
05	4.80	6.20	6.70

5X			
4X			
3X			
2X	Update code options	Judyyan	20220817
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Tony	X:	X°:
	X.X: ± 0.25	X.X: REF5.0°
APPD.: Billy	X.XX: ± 0.15	X.XX: $\pm 3.0^{\circ}$
	X.XXX: ± 0.08	X.XXX: $\pm 2.0^{\circ}$

PART NO : H1200-XXP-A
DWG. NO.:
TITLE : 1.20mm Pitch W-T-B Connector
DATE: 22-Jul-2017

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4