

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0

Rating:
Current Rating:1.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C



Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information



H12500-XXP-XX-A

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — Color code:
GR:Gray
BK:Black
BL:Blue
4: — A:In Bag

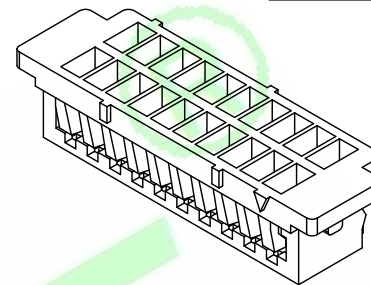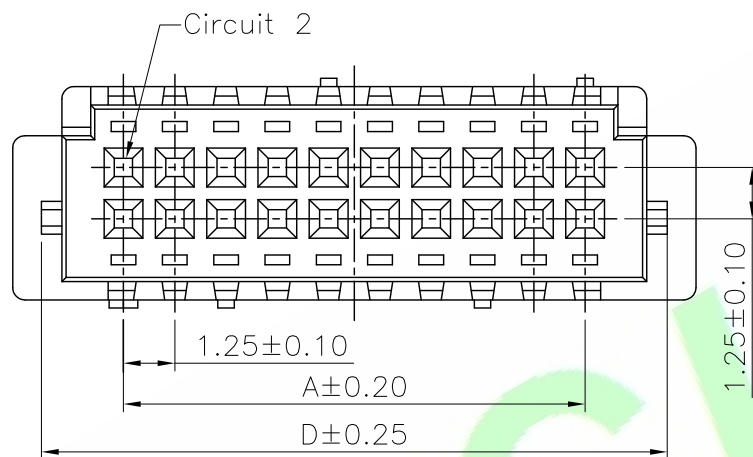

Circuit No.	Dimensions			
	A	B	C	D
10	5.00	10.40	8.00	9.00
12	6.25	11.65	9.25	10.25
14	7.50	12.90	10.50	11.50
20	11.25	16.65	14.25	15.25
30	17.50	22.90	20.50	21.50
34	20.00	25.40	23.00	24.00
36	21.25	26.65	24.25	25.25
40	23.75	29.15	26.75	27.75
42	25.00	30.40	28.00	29.00
50	30.00	35.40	33.00	34.00

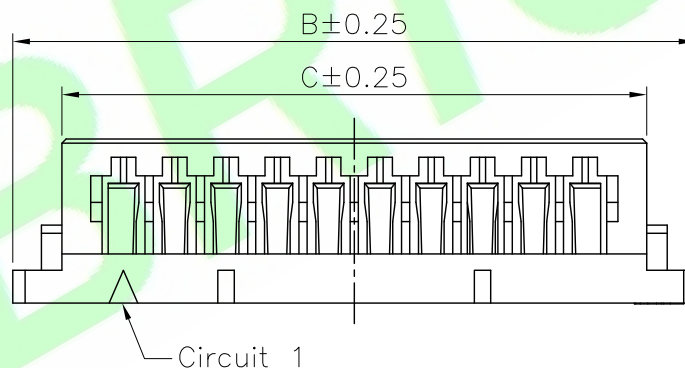


5X			
4X			
3X			
2X	Update code options	Judyyan	20220728
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson
CHKD.: Aaron
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ± 0.30	X': $\pm 5.0^\circ$
X.X: ± 0.25	X.X': $\pm 3.0^\circ$
X.XX: ± 0.15	X.XX': $\pm 2.0^\circ$
X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$

PART NO : H12500-XXP-XX-A
DWG. NO.:
TITLE : 1.25mm Pitch Dual Row Housing
DATE: 10-Oct-2017

HJBRIGHT ® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		