

Specifications:**Material And Finish:**

Contact: Copper alloy

Rating:

Current Rating: 1.0 Amp

Voltage Rating: 50V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 500V AC/Minute

Ordering Information**H12510T-PQ**



1 2 3

1: — Series No.



2: — T: Terminal

3: — Q: Tin Plated


1.55

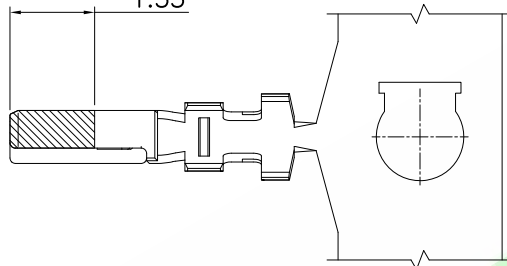


5.20

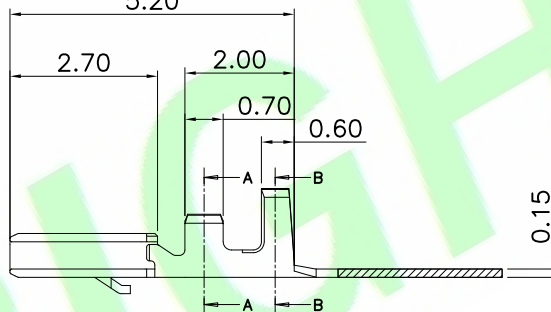

1.55MIN




1.25



SECTION A-A

1.58



SECTION B-B

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H12510T-PQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  A4			
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 1.25mm TERMINAL					
2X				Aren	x.x: ±0.40	x.x': ±3.0°						
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.25	x.xx': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°	DATE: 11-Jul-2021					