

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0 Color:Natural

Rating:
Current Rating:1.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-25°~+85°C






Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information

H1252-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In Bag

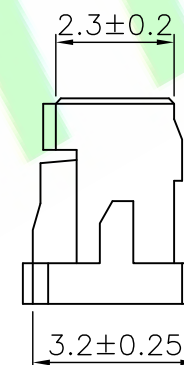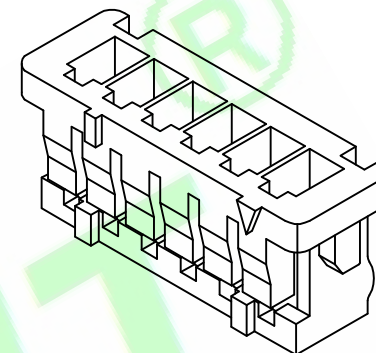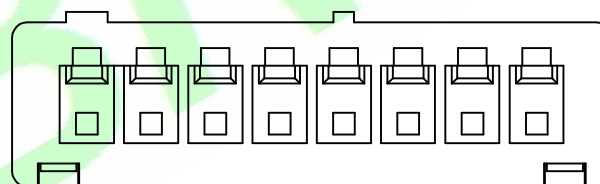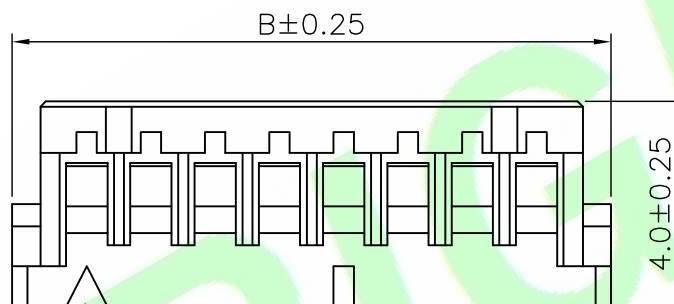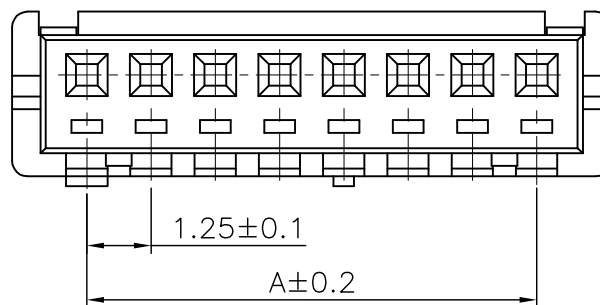

Circuits	Dimensions	
	A	B
02	1.25	4.15
03	2.50	5.40
04	3.75	6.65
05	5.00	7.90
06	6.25	9.15
07	7.50	10.40
08	8.75	11.65
09	10.00	12.90
10	11.25	14.15
11	12.50	15.40
12	13.75	16.65
13	15.00	17.90
14	16.25	19.15
15	17.50	20.40

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H1252-XXP-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE :	1.25mm Pitch Single Row Housing		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X	Update code options	Judyyan		APPD.: Billy	X.X: ±0.25	X.X': ±3.0°	DATE: 10-Oct-2017			UNIT: mm		
1X	ORIGINAL	Samson			X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°						