




RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Natural

Rating:
Voltage Rating:125V AC/DC
Operating Temperature Range:-40°~+105°C

Ordering Information
H12522-XXP-02-A
1 2 3

1:—Series No.
2:—No. of Positions
3:—A:In bag

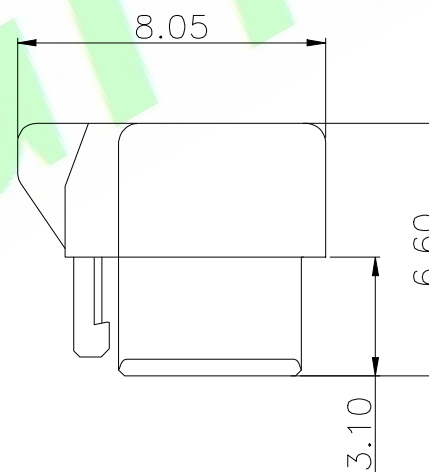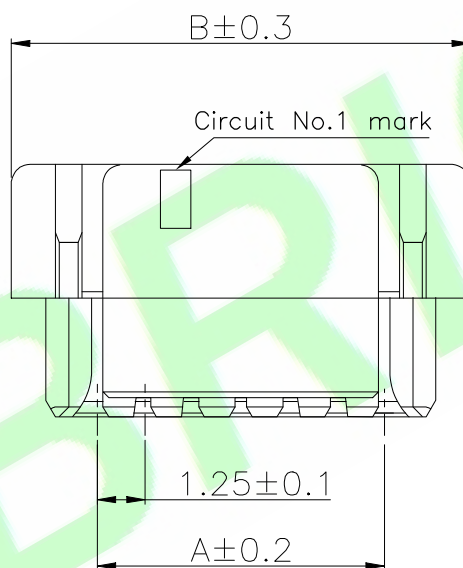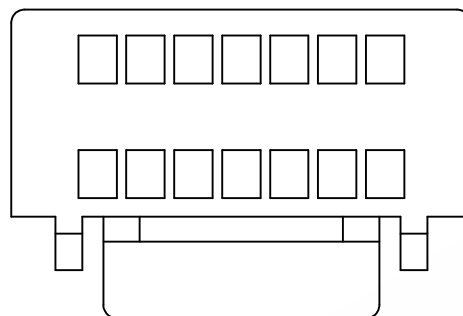


Circuits	Dimensions	
	A	B
10	5.00	9.50
12	6.25	10.75
14	7.50	12.00
16	8.75	13.25
18	10.00	14.50
20	11.25	15.75
22	12.50	17.00
24	13.75	18.25
26	15.00	19.50
28	16.25	20.75
30	17.50	22.00
32	18.75	23.25
34	20.00	24.50
36	21.25	25.75
38	22.50	27.00
40	23.75	28.25

5X			
4X			
3X			
2X			
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Mark
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±0.30	x': ±5.0°
x.x: ±0.20	x.x': ±3.0°
x.xx: ±0.15	x.xx': ±2.0°
x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : H12522-XXP-02-A
DWG. NO.:
TITLE : GHD 1.25mm Pitch Housing
DATE: 02-Jun-2021

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		