

Material:
Terminal: Phosphor Bronze
Wire Range: AWG#26~32
Insulation O.D.: 0.4~1.0mm

Ordering Information

H12522T-PX-XX

1 2 3 4

1: Series No.

2: T: Terminal

3: Plated:




GN: Gold flash on contact; Nickel Plated

Q: Tin Plated


4: Wire Range:

01: AWG#28~32


02: AWG#26~30

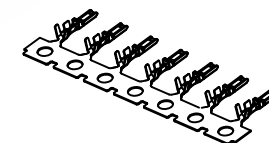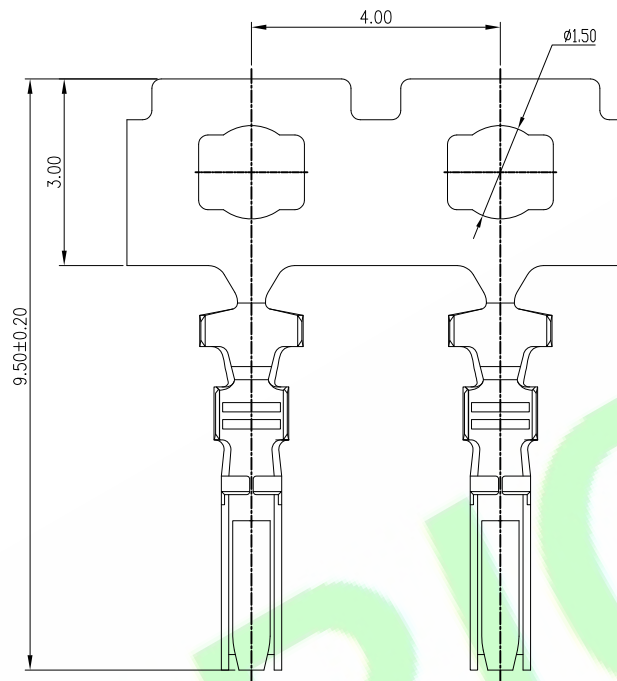


電鍍收料示意圖




SEC:A-A



SEC:B-B



SEC:C-C




SEC:D-D

Type	Wire Range	Insulation O.D	Dim A	Dim B	Dim C	Dim D
01	AWG#28-#32	0.4 to 0.8mm	1.40	1.45	1.10	0.90
02	AWG#26-#30	0.76 to 1.0mm	1.60	1.65	1.15	1.20

5X				DR.BY.: Aren
4X				
3X				CHKD.: Mark
2X				
1X	ORIGINAL	Aren		APPD.: Billy
REV.	DESCRIPTION	DR.BY	ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±0.25
X.X: ±3.0°	X.XX: ±0.15
X.XX: ±2.0°	X.XXX: ±0.08
X.XXX: ±1.0°	

PART NO : H12522T-PX-XX
DWG. NO.:
TITLE : GHD 1.25mm Pitch Terminal
DATE: 19-Jul-2022

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		