
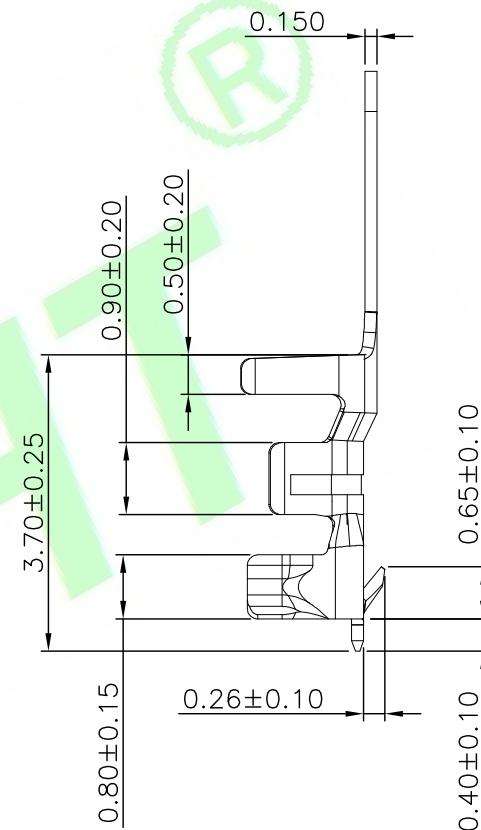


RoHS Compliant




Specifications:  
Material:phosphor bronze  
Wire Range:AWG#26~30  
Insulation O.D.:1.0(max)

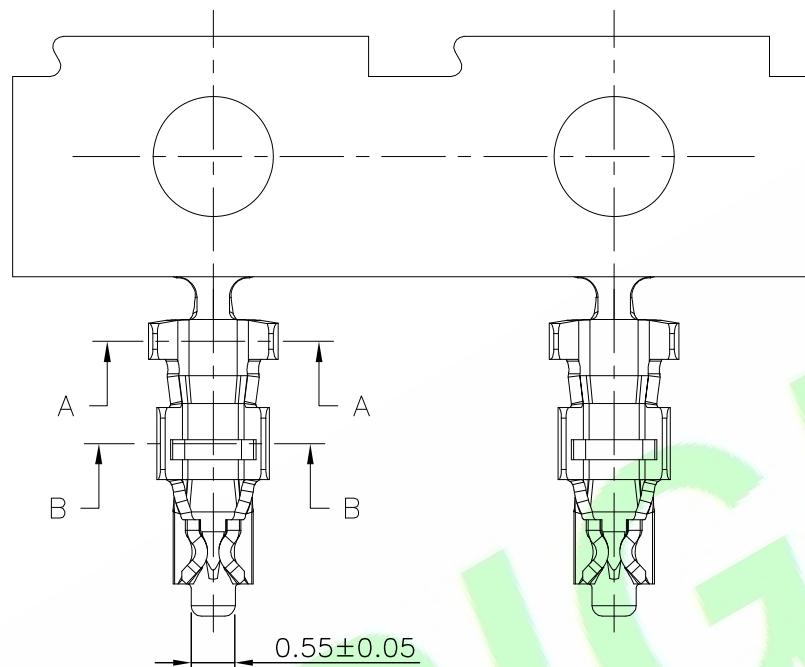

### Ordering Information

#### H1252T-PX

- 1: Series No.  
2: T:Terminal  
3: A:Gold Flash  
Q: Tin Plated

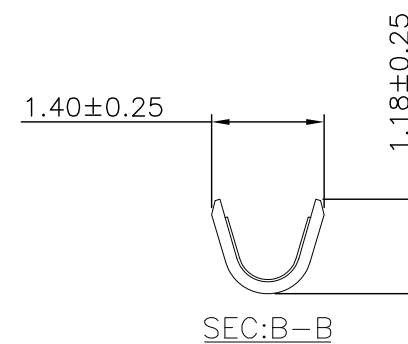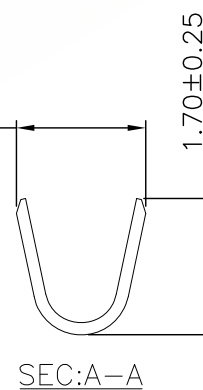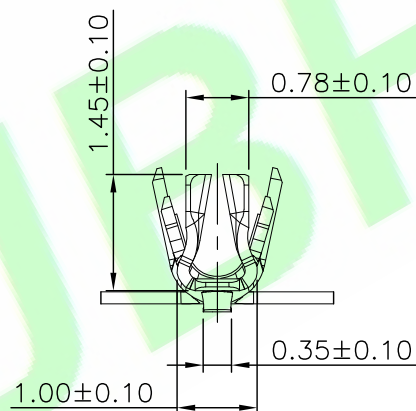

|      |                     |         |          |
|------|---------------------|---------|----------|
| 5X   |                     |         |          |
| 4X   |                     |         |          |
| 3X   |                     |         |          |
| 2X   | Update code options | Judyyan | 20220818 |
| 1X   | ORIGINAL            | Samson  |          |
| REV. | DESCRIPTION         | DR.BY   | ECN. NO. |

|                   |
|-------------------|
| DR.BY.:<br>Samson |
| CHKD.:<br>Tony    |
| APPD.:<br>Billy   |

| GENERAL TOLERANCE: |               |
|--------------------|---------------|
| LINEAR             | ANGLES        |
| X.: ±0.30          | X': ±5.0°     |
| X.X: ±0.25         | X.X': ±3.0°   |
| X.XX: ±0.15        | X.XX': ±2.0°  |
| X.XXX: ±0.10       | X.XXX': ±1.0° |

|                     |
|---------------------|
| PART NO : H1252T-PX |
| DWG. NO.:           |
| TITLE :             |
| DATE: 10-Oct-2017   |

1.25mm Pitch CRIMP TERMINAL

**HJBRIGHT**® 東莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

|            |
|------------|
| SHEET: 1/1 |
| SCALE: 1:1 |
| UNIT: mm   |



THIRD ANGLE PROJECTION

A4